


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

V-8

History of original corner establishment:
Corner not previously set.

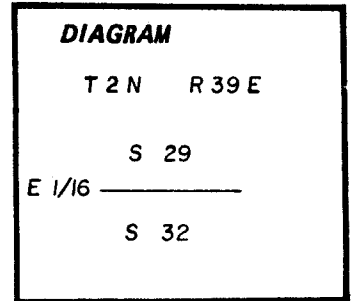

Description of corner evidence found:

Corner not previously set

See survey number 1-81, as filed in the office of the Union County surveyors office.


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 1" x 30" iron pipe with brass cap marked as shown 26" in the ground

New BTs

A 14" pine bears N 16° W, 24.3 ft
marked E1/16 S29 BT

A 14" pine bears S 55° W, 20.2 ft
marked E1/16 S32 BT

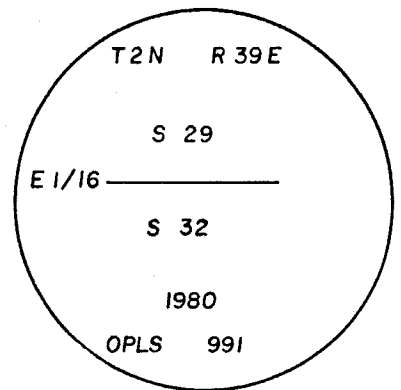

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

I used a steel tape and magnetic compass with 20° E. Declination.
I set a brass washer marked O.P.L.S 991 at the B.T. blaze.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____ ☆ GPO—798-276

By _____

File No. 295-83R