


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner established by James Voelz in Survey Number 6-70. Survey does not show nor does it dimension to the controlling section corner to the West.

T 2 N R 39 E V-14



DESCRIPTION OF CORNER EVIDENCE FOUND:

Found 5/8" iron pin set by James Voelz, South 33° East, a distance of 6.07 feet from true corner position.

SEE SURVEY NUMBER 025-2014

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" iron pin, 29 inches in the ground, with 2 1/2" aluminum cap marked as shown below, from which:

- An 11 inch Ponderosa Pine bears South 79° West, a distance of 34.20 feet, marked W 1/16 S34 BT.
- An 11 inch Ponderosa Pine bears North 16° West, a distance of 25.90 feet, marked W 1/16 S27 BT.

Set a steel fencepost approximately 0.5 feet North of the corner monument. I hereby certify that the corner was monumented on August 26, 2014.

Witness: Thomas J. Kopp


UNION COUNTY SURVEYOR

Date Received 9/9/14

Date Filed 9/9/14

Filed By [Signature]

File Number 042-2014R

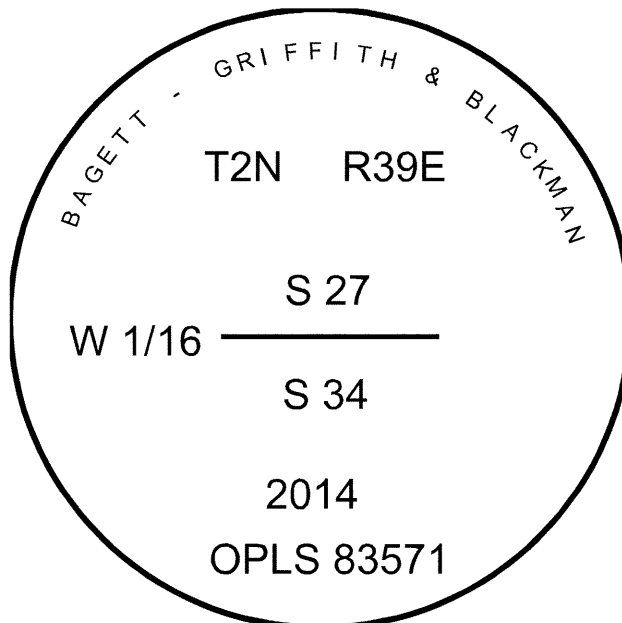

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]

OREGON
June 2, 2010

JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

I used a steel tape and magnetic compass in the establishment of the accessories. I used 16° East declination. The distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the bearing trees.