

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Rufus Moore in GLO contract no. 382, dated March 23, 1881. Surveyor General field notes state:

Set post for 1/4 Sec. Cor., from which:
A pine 34 in. diam., bears N44°E, 106 lks. dist.
A pine 30 in. diam., bears S44°W, 74 lks. dist.

In Survey Number 18-62, Arthur Graham sets a 2"x28" truck axle, set 20 in. in ground, 14 lks. North of a spring branch, from which:
A pine 20" diameter bears N75°W, 2.31 ch. diat.
A pine 30" diam., bears S49°15' W., 1.50 chs. dist.

T 2 N R 39 E X-17



DESCRIPTION OF CORNER EVIDENCE FOUND:

Truck axle has been removed due to erosion. I place the position, as per the Graham survey, from the two bearing trees taken by Graham. From the corner position:

A 40" Ponderosa Pine bears South 50° West, a distance of 99.0 feet, alive and vigorous with healed blaze.
A 33" Ponderosa Pine bears North 74° West, a distance of 152.5 feet, alive and vigorous with healed blaze.

Position falls on steep North bank of a creek, unsuitable for durable monumentation.

SEE SURVEY NUMBER 025-2014

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At a point N0°05'41"W, 10.00 feet from the position as established above, I set a 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap marked as shown below, 30" in the ground, in a collar of stone, 1 ft. diam., from which:

The 33" Ponderosa Pine, mentioned above, bears North 77° West, a distance of 149.95 feet.
The 40" Ponderosa Pine, mentioned above, bears South 46° West, a distance of 105.73 feet.

NEW BEARING TREE:


An 8 inch Ponderosa Pine bears South, a distance of 22.70 feet, marked X BT. (to witness corner monument)
No other accessories available.

Set a steel fencepost approximately 1 ft North of corner monument.

I hereby certify that the corner was monumented on August 22, 2014.

Witness: Thomas J. Kopp

UNION COUNTY SURVEYOR
Date Received 9/9/14
Date Filed 9/9/14
Filed By [Signature]
File Number 049-2014R

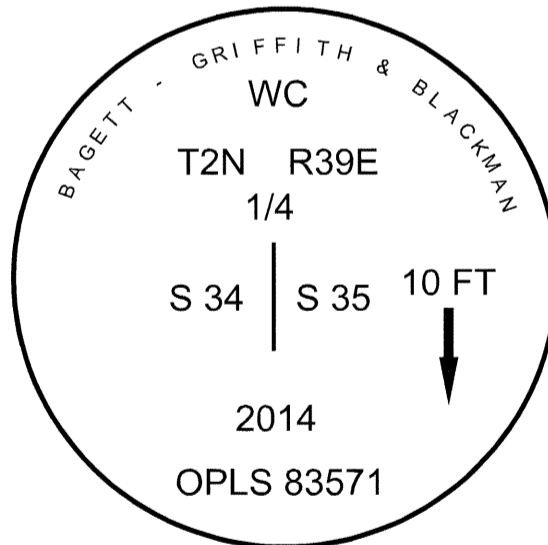

REGISTERED PROFESSIONAL LAND SURVEYOR
[Signature]
OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing tree. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing tree.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201418

1/4 SECTION CORNER COMMON TO SECTIONS 34 AND 35

TWP. 2 N. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: August 22, 2014

LAT: 45 ° 36 ' 33.36887 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 54 ' 41.41557 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 718838.461 INT FT.

E: 8864403.701 INT FT.

TYPE: GPS

THETA: 1 ° 50 ' 8.60977488 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999241187

ELEV: 2769.98 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner falls on steep creek bank. Set witness corner North 10 ft. from true corner. Set fence post 1 ft. North of Monument.

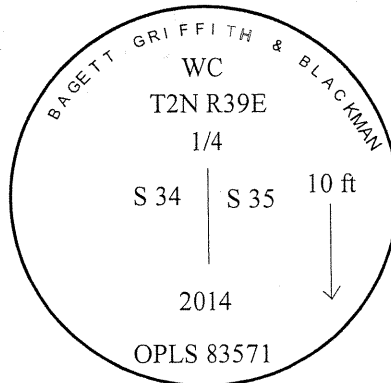

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2014

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)