


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously set

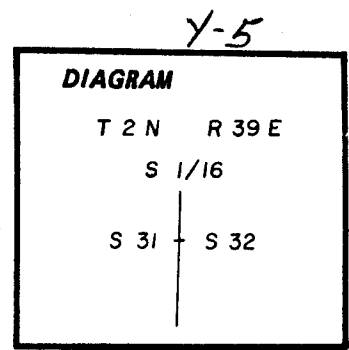

Description of corner evidence found:

Corner not previously set

See survey number 1-81 as recorded in the office of the Union County Surveyor

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 1" x 30" iron pipe with brass cap marked as shown, 26" in the ground.


New BTs

- A 30" spruce bears S 74° W, 25.2 ft marked S 1/16 S31 BT
- A 14" tamarack bears S 70° E, 33.9 ft marked S 1/16 S32 BT

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

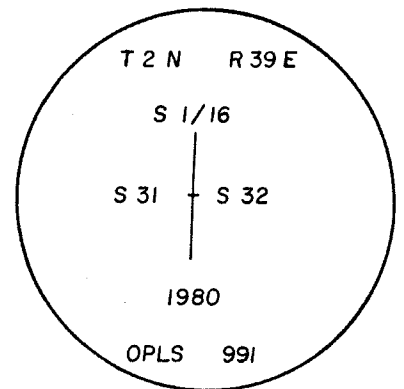

I used a steel tape and magnetic compass with 20° E declination. I set a brass washer marked OPLS 991 at the BT blazes.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed _____ ☆ GPO-798-276

By _____

File No. 300-83R