

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of original corner establishment:

Original corner set by Rufus S. Moore under contract No. 382 dated March 23, 1881, and approved March 21, 1882.

Record States:

Set post for sec. cor.

From Which:

A pine, 4 ins. diam., bears N. 43° E., 77 lks. dist.


A pine, 5 ins. diam., bears S. 57° E., 19 lks. dist.

A pine, 4 ins. diam., bears S. 62° W., 107 lks. dist.

A pine, 24 ins. diam., bears N. 47° W., 94 lks. dist.

Township 2 North, Range 40 East

A-5

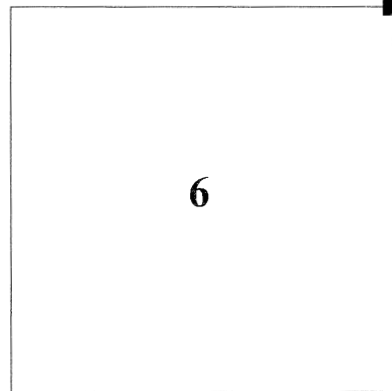

## Subsequent survey:

Corner refurbished by James H. Hambleton, LS 645, as shown on CS 003-1970.

Record States:

Found one bearing tree thus was able to reset sec. cor. by placing a mound of stone.



## Description of evidence found:

Found embedded mound of stone.

From Which:

A pine, 18 ins. diam., alive and healthy, bears S. 57° E., 19 lks. (12.5 ft.) dist., with visible scribe on chopped open blaze.

## Description of monument and accessories established to perpetuate the location of this corner.

At position of found stone mound, I set a 2 ins. diam. aluminum cap, on a 5/8 ins. diam. x 30 ins long iron rod, marked as shown. From which:

A ponderosa pine, 6 ins. diam., bears N. 24° E., 69.5 ft. dist., marked "X BT" on a double blaze.

A ponderosa pine, 19 ins. diam., alive and healthy, bears S. 57° E., 12.5 ft. dist., with visible scribe on a chopped open blaze.

A ponderosa pine, 14 ins. diam., bears S. 41° W., 52.2 ft. dist., marked "1/4 S6 BT" on a single blaze.

A ponderosa pine, 12 ins. diam., bears N. 46° W., 95.0 ft. dist., marked "1/4 S31 BT" on a single blaze.

Corner position falls in timber on mostly level ground.

Bearings are made with a hand compass, magnetic declination = 15°E.

I hereby certify that the above corner point was perpetuated as herein described on 5/18/2018.

Witnessed by:

Matt Brockamp, LS

Austin Brockamp

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
MAY 20, 2015  
MATTHEW R. BROCKAMP  
78556

Registration expires 12/31/2019

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>7/19/18</u>
Date Filed	<u>9/13/18</u>
Filed By	<u>N. H. Gilman</u>
File Number	<u>041-2018R</u>



**HORIZONTAL CONTROL DATA**  
**UNION COUNTY, OREGON**  
**OREGON STATE PLANE, NORTH ZONE (3601)**

STA NAME: 2018044

SECTION CORNER COMMON TO SECTIONS 5, 6, 31 AND 32

TWP. 2 &3N RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: December 11, 2018

LAT: 45 ° 41 ' 22.28199 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 50 ' 59.98702 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 748595.150 INT FT.

E: 8879176.163 INT FT.

TYPE: GPS

THETA: 1 ° 52 ' 45.6438041 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999358803

ELEV: 2824.81 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8" iron pin with 2" aluminum cap  
marked as shown.

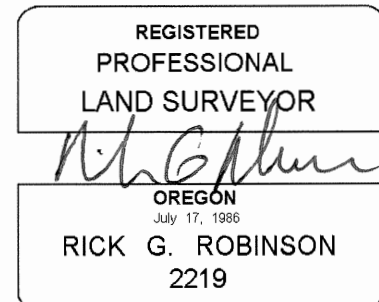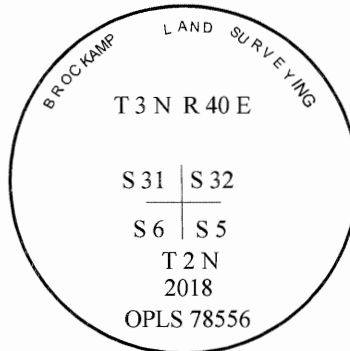

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)