


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner was originally established under GLO contract number No. 437, dated June 3, 1882, executed by Rufus Moore. Surveyor General field notes state:

Set post for 1/4 sec. cor. from which:  
A fir 10 in diam bears N 3° W 23 lks dist  
A fir 7 in diam bears S 71° E 8 lks dist

T 3 N R 40 E Z-19

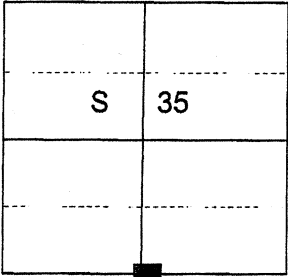

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

SEE SURVEY NUMBER CS 2025-019(Wallowa Co)/SURVEY NUMBER 022-2025(Union Co)

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position, I set 2 1/2" x 30" aluminum pipe with a 3" aluminum cap, marked as shown below, from which:

NEW BEARING OBJECTS:


A 12" Douglas Fir bears North 62° East, a distance of 23.15 feet, marked 1/4 S35 BT.

A 7" White Fit bears South 61° East, a distance of 6.65 feet, marked 1/4 S2 BT.

A 6" White fir bears South 2° West, a distance of 11.55 feet, marked 1/4 S2 BT.

A 13" Douglas Fir bears North 12° West, a distance of 18.35 feet, marked 1/4 S35 BT.

Set steel fencepost 1 ft West.

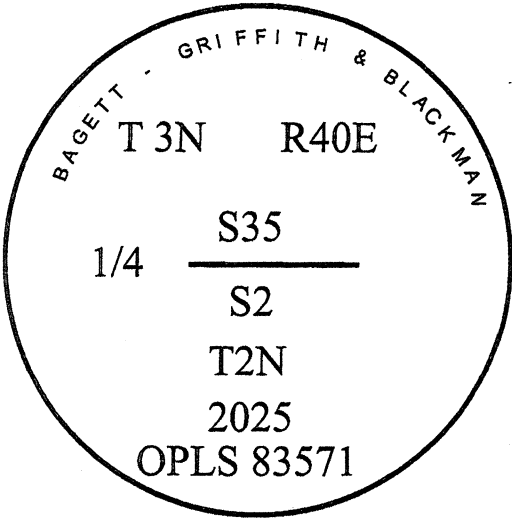

I hereby certify that the corner was monumented on June 23, 2025

Witness: Kyle Tucker, Adam Gordon



Renewal Date: June 30, 2027

I used a tape and compass in the establishment of the bearing trees. 14° East was used for declination and measured to a brass washer marked "OPLS 83571" and tacked to the opened BT blaze. Distance was to a 60-D spike in the root crown on the right side of the tree.

