


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by James H. Hambleton, LS 645, as shown on CS 003-1970.
Record States:
Set a mound of stone in fence line as a temporary point from which the true corner bears N. 64°27' W., 28.82 ft. and being the true center of sec. 6.

Township 2 North, Range 40 East
C-3

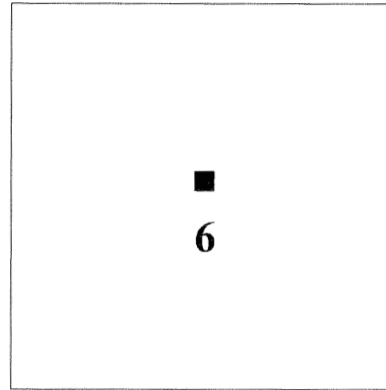

Subsequent survey:

None found

Description of evidence found:

Found an unrecorded 5/8 ins.diam. Iron Rod in a mound of stone from which a mound of stone bears S. 64°27' E., 28.82 ft. in a N-S fence.



Description of monument and accessories established to perpetuate the location of this corner.

At position of found stone mound, I set a 2 ins. diam. aluminum cap, on a 5/8 ins. diam. x 30 ins long iron rod, marked as shown.

From which:

- A 5/8" x 30" long iron rod with yellow plastic cap marked "BROCKAMP LAND SURVEYING PLS 78556" bears N. 42° E., 34.7 ft. dist., in N-S fence.
- A 5/8" x 30" long iron rod with yellow plastic cap marked "BROCKAMP LAND SURVEYING PLS 78556" bears S. 63° E., 29.3 ft. dist., in stone mound remains along N-S fence.
- A ponderosa pine, 14 ins. diam., bears S. 68° W., 118.5 ft. dist., marked "C1/4 S6 BT" on a single blaze.
- A ponderosa pine, 18 ins. diam., bears N. 44° W., 181.5 ft. dist., marked "X BT" on a double blaze.

Corner position falls on mostly level and open rocky ground.

Bearings are made with a hand compass, magnetic declination = 15°E.

I hereby certify that the above corner point was perpetuated as herein described on 5/18/2018.

Witnessed by:
Matt Brockamp, LS
Austin Brockamp

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Matthew R. Brockamp
OREGON
MAY 20, 2015
MATTHEW R. BROCKAMP
78556

Registration expires 12/31/2019

UNION COUNTY SURVEYOR
Date Received <u>7/19/18</u>
Date Filed <u>9/13/18</u>
Filed By <u>M. G. Hain</u>
File Number <u>043-2018R</u>

