


UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was never set.

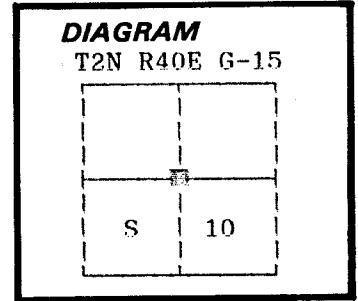

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

See Map of Survey Number 015-1992.

Description of monument and accessories I established to perpetuate the original location of this corner:

At position determined by survey, I set a 2-1/2" X 30" aluminum pipe with aluminum cap 18" in the ground, marked as shown, from which;


- A 12" ponderosa pine bears N24°E, 146.20 feet marked X X BT
- A 5/8" x 30" rebar bears S48°W, 91.46 feet with 2" aluminum cap marked "SE RP".
- A 18" Ponderosa Pine bears S77°W, 227.18 feet marked C 1/4 S10 BT
- A 14" Ponderosa Pine bears N80°W, 103.88 feet marked X BT

Raised mound of stone, 3 foot base to top of cap.
Set steel fence post 3 ft. south.

There is a N-S fence line aprox. 70' east.
I found the dim remains of an old N-S fence line aprox. 18 feet east.

I hereby certify that the above corner point was perpetuated as hereon described on May 14, 1992.

Whitness:
Pete Crabtree
Rick Robinson

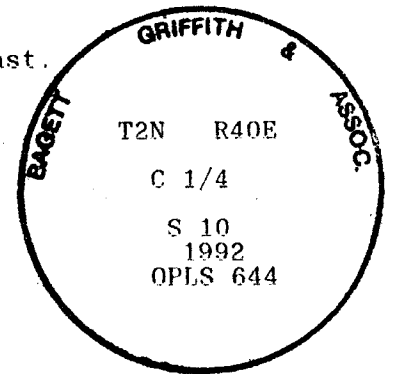

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1964
**DUANE I. GRIFFITH
644**

UNION COUNTY SURVEYOR	
Date Received	<u>6/10/92</u>
Date Filed	<u>6/20/92</u>
By	<u><i>Greg Blain</i></u>
File No.	<u>033-1992R</u>