


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was established by Rufus Moore under GLO Contract No. 382, dated March 23, 1881.

Surveyor General record states:

"Set basalt stone 16 x 8 x 6 ins. in mound of stone for cor. to Secs. 9, 10, 15 and 16. August 4th, 1881."

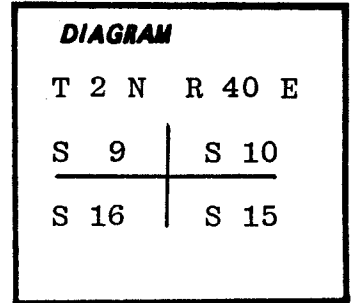

Description of corner evidence found:

Found basalt stone 18 x 8 x 5 ins. lying flat on ground at a fence corner. Three grooves mark one side of stone. Fences run N, S and W from corner point.

Description of monument and accessories established to perpetuate the original location of this corner:

UNION COUNTY SURVEYOR	
Date Received	<u>12-31-85</u>
Date Filed	<u>12-31-85</u>
By	<u>G. LANGLITZ DEPUTY</u>
File No.	<u>177-85 R</u>

Set a 1½-inch O.D. iron pipe with 2½-inch brass cap in a stone mound at found stone location. Pipe is 30 inches long, set 22 inches in the ground. Deposited stone one ft. deep alongside.

Set a steel fence post alongside with USFS Sign No. 54-4 attached. Attached USFS BT tag to fc. post with "Corner is here scribed on tag."

Monument is marked thus:

T 2 N R 40 E

S 9		S 10
S 16		S 15

PLS 1206

1985

I certify that the above described corner monument was properly reestablished under my supervision on July 1, 1985 by Tom Fisk and Chris Mahoney.

REGISTERED PROFESSIONAL LAND SURVEYOR
<i>James D. Hanley</i>
COMMISSION EXPIRES SEPTEMBER 23, 1987 JAMES D. HANLEY 1206


Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

History of original corner establishment:

Corner was originally set by Rufus S. Moore under GLO contract no. 382, dated March 23, 1881.


Union County survey 5-85 calls finding original corner stone at fence corner and setting rebar.

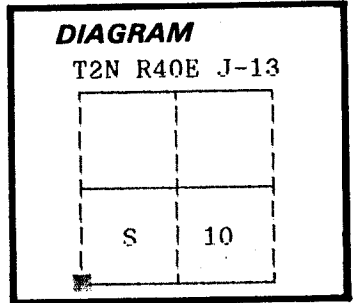

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found 1 1/2" pipe with 2" brass cap marked as shown in small mound of stone at fence corner N-S-W.



Description of monument and accessories I established to perpetuate the original location of this corner:

From found brass cap:

NEW BEARING OBJECTS:

- A 26" Ponderosa Pine bears S27°W, 100.5 feet marked T2N R40E S16 BT.
- A 5/8" x 30" rebar bears N3°E, 11.75 feet with 2" aluminum cap marked UNION COUNTY SURVEYOR NE RP.
- A 5/8" x 30" rebar bears N82°W, 15.48 feet with 2" aluminum cap marked UNION COUNTY SURVEYOR NW RP.
- A 5/8" x 30" rebar bears S3W°, 9.70 feet with 2" aluminum cap marked UNION COUNTY SURVEYOR SW RP.

I hereby certify that the above corner point was perpetuated as hereon described on April 28, 1992.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

UNION COUNTY SURVEYOR	
Date Received	<u>6/10/92</u>
Date Filed	<u>6/20/92</u>
By	<u>Greg Black</u>
File No.	<u>038-1992R</u>

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2019022

SECTION CORNER COMMON TO SECTIONS 9, 10, 15 AND 16

TWP. 2 N RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 3, 2019

LAT: 45 ° 39 ' 39.91301 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 48 ' 29.32003 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 738586.013 INT FT.

E: 8890210.814 INT FT.

TYPE: GPS

THETA: 1 ° 54 ' 32.4947278 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999314873

ELEV: 3524.93 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

1 1/2" iron pipe with 2 1/2" Brass cap
cap marked as shown

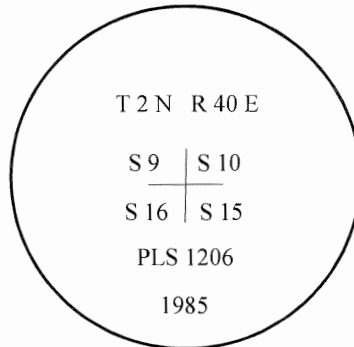

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2020

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)