

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Witness corner to East 1/4 corner, Section 13, T2N, R39E and the West 1/4 corner, Section 18, T2N, R40E, W.M., Union County, Oregon.

Original corner established in 1864 by T. Davenport under contract No. 102 approved 1/12/1864. He set a basalt stone 24"x12"x3" in a mound of stones for a Witness Corner 65 Lks South of the original 1/4 corner on the Southeast bank of the Grande Ronde River.

Description of corner evidence found:

I found a mound of stones on the Southeast bank of the Grande Ronde River. The original corner stone was not recovered.

REGISTERED
PROFESSIONAL
LAND SURVEYOR
B. Sutton
OREGON
JULY 13, 1979
B. A. SUTTON
1848
RENEWAL 6/30/98

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 5/8" x30" iron rod with a 1-1/2 inch aluminum cap marked: in the mound of stones described above.

I established the following references:


An 18" Douglas Fir bears N43°20'E, 102.00' blazed and scribed T2NR40EWCS18BT

A 1-1/2" aluminum cap wedged in a crevice marked: bears N57°10'E, 36.38'

(Cap is 3' above river bottom on a nearly vertical rock wall.)

A 1-1/2" aluminum cap on a 5/8" X30" iron rod marked: bears N9°03'W, 11.30'.

A 5" diameter, 4" deep crater near the point of a submerged boulder (top is at the level of the river bottom) bears N80°W, 13.1'.

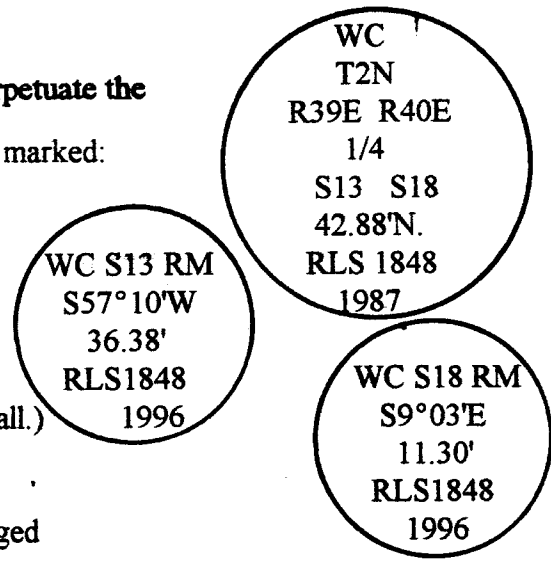

Office of the _____ County Surveyor _____ County of _____ Union _____.

State of Oregon, I hereby certify that the within instrument was filed in this office

for record on the _____ day of _____, 19 _____.

_____ by _____
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR
Received 10/20/96
11/14/96
Greg T. Dunc
File No. 109-1996R