


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by Rufus S. Moore under GLO contract Number 382, dated March 23, 1881. Surveyor General record states:
Set post for 1/4 sec. cor., from which:
A Pine 44" diam bears N45°E, 109 lks.
A Pine 8" diam bears S58°W, 31 lks.

T 2 N R 40 E L-17



Corner was re-established by James Hanley in 1984. Union County Survey record 5-85 states:
Set 1/4 cor. point. Set 5/8" rebar with yellow plastic cap marked HANLEY ENGR PLS 1206 for cor. point and 5/8" x 30" rebars 40 ft. West and 40 ft. East. for references to cor.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found a 5/8" rebar 1" below road surface.
From which:
A 5/8" rebar with yellow plastic cap bears WEST, a dist. of 40.00 feet.
A 5/8" rebar with yellow plastic cap bears EAST, a dist. of 40.10 feet, bent slightly East.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the found iron pin, I drive it 4" below the road surface and place a 2 1/2" aluminum cap on it, marked as shown below.
From which:

NEW BEARING OBJECT:


A 5/8" x 30" iron pin bears South 48° West, a distance of 22.80 feet, with a 1 1/2" aluminum cap marked UNION COUNTY SURVEYOR SW RP.
A 5/8" x 30" iron pin bears North 54° West, a distance of 18.05 feet, with a 1 1/2" aluminum cap marked UNION COUNTY SURVEYOR NW RP.

Fence lines going East and West align with monument. Corner falls in the centerline of Yarrington Road.

I hereby certify that the corner was perpetuated on January 28, 2019.

Witness: Kyle Tucker

REGISTERED
PROFESSIONAL
LAND SURVEYOR




OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2019

**UNION COUNTY
SURVEYOR**

Date Received 2/19/19
Date Filed 2/19/19
Filed By ALG
File Number 012-2019R

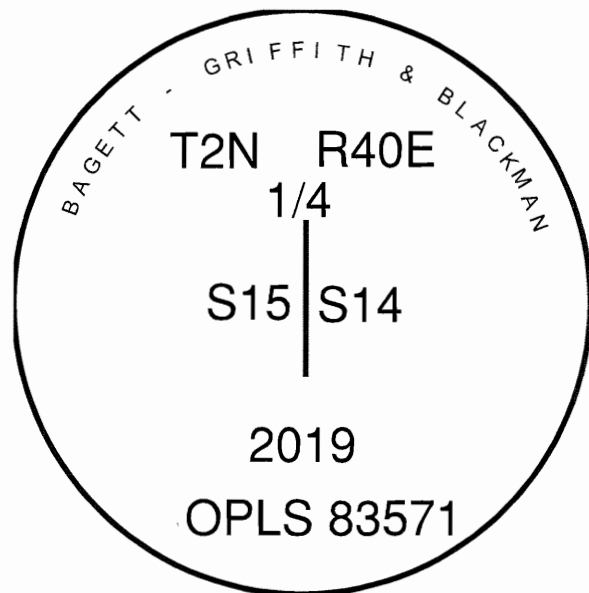

I used a steel tape and magnetic compass in the establishment of the new accessory. I used 13° East declination. Distances and bearings are to the center of the aluminum caps.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2019013

1/4 SECTION CORNER COMMON TO SECTIONS 14 AND 15

TWP. 2 N RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: January 28, 2019

LAT: 45 ° 39 ' 12.19917 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 117 ° 47 ' 16.83626 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 735952.755 INT FT.

E: 8895449.987 INT FT.

TYPE: GPS

THETA: 1 ° 55 ' 23.8992074 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999303406

ELEV: 3439.91 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

5/8" iron pin with 2 1/2" aluminum cap
marked as shown

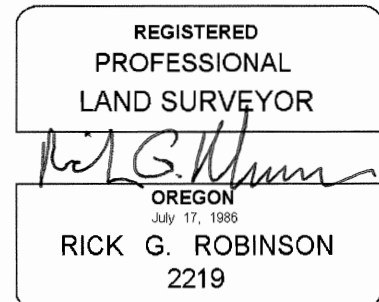

Renewal Date: December 31, 2020

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)