

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

1/4 corner common to Section 24, T2N, R39E and Section 19, T2N, R40E, W.M., Union County, Oregon.

Original corner established in 1864 by T. Davenport under contract No. 102 approved 1/12/1864. He set a basalt stone 16"x12"x8" in a mound of stones. No bearing trees or references set in original survey.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*B. Sutton*

OREGON  
JULY 13, 1979  
B. A. SUTTON  
1848

RENEWAL 6/30/98

**Description of corner evidence found:**

No original corner evidence found. East-West fences run from the approximate right of way lines of the County Road No. 46 in both the East and West directions with an approximate 3.5' offset in a North-South direction from one another.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

I set a 5/8"x30" iron rod with a 1-1/2 inch aluminum cap marked: at the intersection of a line between the above described fence corners and the centerline of County Rd. No. 46.


I established the following references:

A 5/8"X30" iron rod with a 1-1/2" aluminum cap marked: bears S86°43'W, 30.00' (rising 2")

A 5/8"X30" iron rod with a 1-1/2" aluminum cap marked: bears N86°43'E, 30.00' (rising 2")

A 5/8"X30" iron rod with a 1-1/2" aluminum cap marked: bears S45°00'E, 42.20' (down 4")

A 20" Juniper bears N8°00'W, 299.8' blazed and scribed T2NR39E1/4S24BT

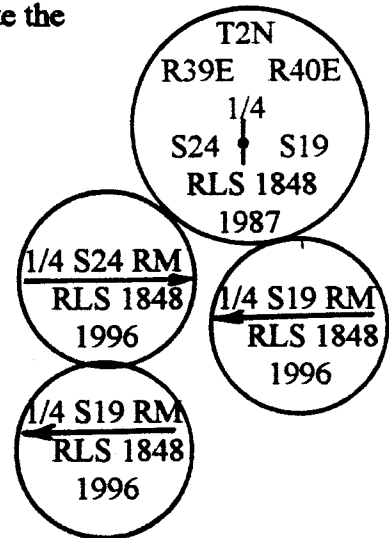

Office of the \_\_\_\_\_ County Surveyor \_\_\_\_\_ County of \_\_\_\_\_ Union \_\_\_\_\_

State of Oregon, I hereby certify that the within instrument was filed in this office

for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19 \_\_\_\_\_

\_\_\_\_\_ by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY  
SURVEYOR.

Received 10/20/96

Filed 11/14/96

By Guyon T. [Signature]

File No. 110-1996R

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201542

1/4 SECTION CORNER COMMON TO SECTIONS 19 AND 24

TWP. 2 N. RGE. 39 & 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: October 23, 2015

LAT: 45 ° 38 ' 18.84660 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 52 ' 12.37846 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 729857.992 INT FT.

E: 8874644.878 INT FT.

TYPE: GPS

THETA: 1 ° 51 ' 54.3048124 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999281841

ELEV: 3149.87 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

5/8" iron pin with 1 1/2" aluminum cap marked as shown, 6" below centerline of Hardy Road in extension of fencelines to the East & West



REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2016

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)