

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Rufus S. Moore under GLO contract number 382, dated March 23rd, 1881. GLO record states:

Set a 18x12x6 stone for cor sec to 19,20,30,29 with 2 notches on South and 5 notches east, from which:

No record of subsequent monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 18x12x6 stone with notches visible in a rock jack at southwest fence corner  
SEE COUNTY SURVEY NUMBER 014-1999

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position of found stone, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown below, 20" in the ground with a mound of stone, from which:

**NEW BEARING OBJECTS:**

A 5/8 x 30" iron rebar with aluminum cap bears N 45° E, a distance of 20.28 feet, marked NE RP.

A 5/8 x 30" iron rebar with aluminum cap bears N 48° W, a distance of 48.24 feet, NW RP.


A 5/8 x 30" iron rebar with aluminum cap bears S 45° W, a distance of 44.70 feet, marked SW RP.

A 5/8 x 30" iron rebar with aluminum cap bears S 42° E, a distance of 23.92 feet, SE RP.

I hereby certify that this corner was monumented on April 12, 1999.

Witnesses: Greg Blackman Jr., Greg Engelgau and Norbert Volny.

T 2 N R 40 E R-05

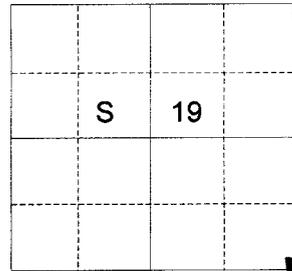


REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

Renewal Date: Dec. 31, 1999

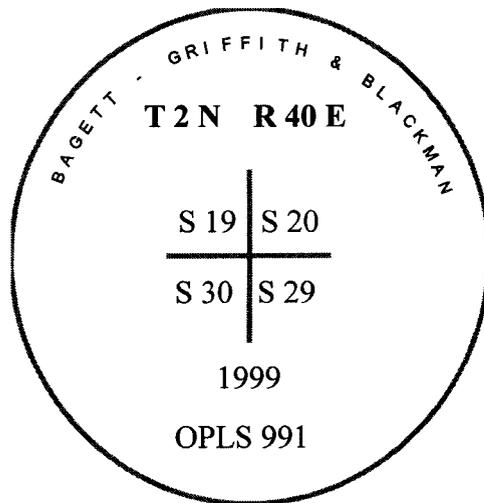

**UNION COUNTY SURVEYOR**

Date Received 4/15/99

Date Filed 5/15/99

Filed By R. Robinson, Deputy

File Number 011-1999R

I used the Leica TCA 1100 total station in the establishment of the new accessories. The distances are to the center of a 1 1/2" aluminum cap on top of a 5/8 x 30" iron rebar.

R-05