

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Rufus S. Moore under GLO contract Number 382, dated March 23, 1881. GLO record states:

Set Post for 1/4 Sec. Cor. from which:

- A Pine 40" Diam bears N 13° E 238 lks dist
- A Pine 4" Diam bears N 12° W 210 lks dist

T 2 N R 40 E T-09



No record of further monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

NONE

See Survey Number 023-1998

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At surveyed position, I set a 5/8" x 24" Copper Clad with 2 1/2" Brass Cap as shown in valve box 27 inches in the ground from which:

**NEW BEARING OBJECTS AND TREES:**

A P.K. nail set in Power Pole 3 feet above ground bears N 17° E, a distance of 110.78 feet, power pole # 018281034.

A 5/8" x 30" Iron Rebar with 1 1/2" Aluminum Cap bears S 55° E, a distance of 43.16 feet, marked SE RP

A 14" Ponderosa Pine bears S 36° W, a distance of 76.60 feet, marked T 2 N, R 40 E, S29, 1/4, BT.


A 5/8" x 30" Iron Rebar with 1 1/2" Aluminum Cap bears N 65° W, a distance of 44.53 feet, marked NW RP

I hereby certify that the corner was monumented on July 16, 1998.  
Witness: Jeff Madsen, Greg Blackman Jr, and Norb Volny

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*  
OREGON  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

Renewal Date: December, 31 1999

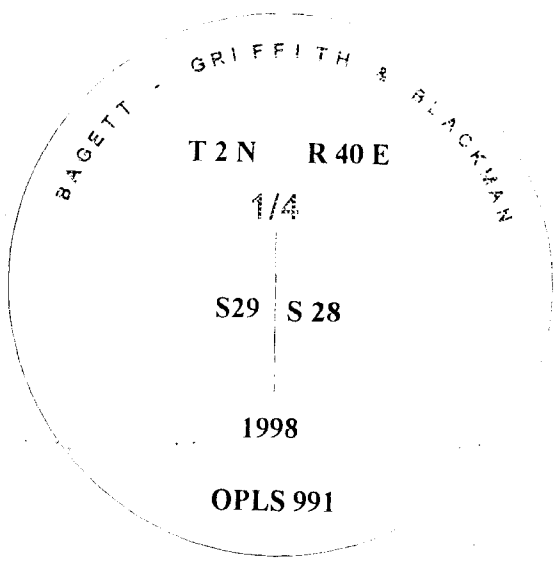

**UNION COUNTY SURVEYOR**

Date Received 7/20/98

Date Filed 8/29/98

Filed By R. ROBINSON, DEPUTY

File Number 036-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to the center of the reference object. BT distances are to a 60d spike driven into the right side of the root crown. A brass washer marked OPLS 991 is attached to the BT Blaze.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200523

1/4 SECTION CORNER COMMON TO SECTIONS: 29 and 28

TWP. 2 N. RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: August 5, 2005

LAT: 45 ° 37 ' 28.27955 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 117 ° 49 ' 43.63409 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 725085.850 INT FT.

E: 8885376.617 INT FT.

TYPE: GPS

THETA: 1 ° 53 ' 39.7922344 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999262023

ELEV: 3399.03 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is 5/8" "copper clad" iron pin with 2 1/2" brass cap set in a water valve box. Brass cap is marked as shown: Corner falls in Good Road

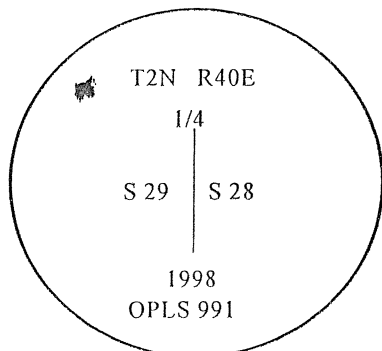

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986

RICK G. ROBINSON  
2219

Renewal Date: December 31, 2006

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)