


Index
 File No. V 17 **CORNER RECORD (SEARCH)** (Ref. FSM 7151.4) Tract or Survey No. _____ Cor. SW corn. No. Sec 26
 T 2 S _____ R. 34 E _____ R.D. La Grande County Union
 Merid. Will. N.F. W-w State Oregon

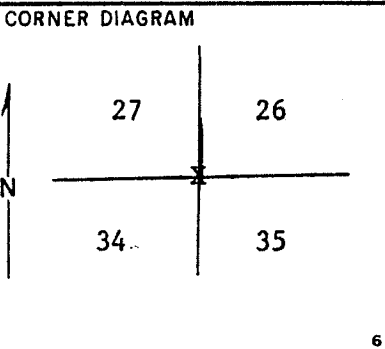

DESCRIBE CORNER MONUMENT FOUND

Sec. corner found 4x4 wood post (rotted) 2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

No BT's found 3

PHOTO IDENTIFICATION DATA

UPM No. UBM 0 6C 24

Filed At. _____

Object Ident. _____

Ident. By _____
Signature 7

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____
Agency 8

Signature	Title	Division Whitman	Headquarters La Grande	Date 1966	7100-52 (3/68) 5
-----------	-------	---------------------	---------------------------	--------------	---

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 42-87R

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 2 S., R. 34 E., Willamette Meridian, Oregon

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By J. L. DEPUTY

File No. 227-2013R

from which

A ponderosa pine, 14 ins. diam., bears S. 55° E.,
52½ lks. dist., mkd. N 1/16 S35 BT.

A lodgepole pine, 7 ins. diam., bears S. 29¾° W.,
18½ lks. dist., mkd. N 1/16 S34 BT.

Deposit a white "DEEP-1" magnetic marker at the base and set a
steel fence post alongside the stainless steel post.

39.85 Gravelled road, 20 lks. wide, bears N. 60° W. and S. 60° E.

40.190 The cor. of secs. 26, 27, 34, and 35, monumented with the point
of the original wood post, firmly set flush with the ground, with
the original wood post, 3 x 3 ins., with scribe mark S, lying
alongside, and a mound of stone, 3 ft. base, 1 ft. high, N. of
the corner, from which an original bearing tree:

A larch, 31 ins. diam., bears N. 60¾° E., 78½ lks.
dist., no marks on rotted and burned blaze.
(Record, pine, N. 62° E., 76 lks.)

2534
V17

At the corner point

Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins.
in the ground, with brass cap mkd.

T 2 S	R 34 E
S 27	S 26
S 34	S 35
1987	

from which new bearing trees

A fir, 19 ins. diam., bears S. 26° E., 151 lks. dist.,
mkd. T2S R34E S35 BT.

A fir, 12 ins. diam., bears S. 42½° W., 106½ lks. dist.,
mkd. T2S R34E S34 BT.

A fir, 11 ins. diam., bears N. 39½° W., 21 lks. dist.,
mkd. T2S R34E S27 BT.

Deposit a white "DEEP-1" magnetic marker at the base and the
original wood post and a steel fence post alongside the stainless
steel post.

T. 2 S., R. 34 E., Willamette Meridian, Oregon

FEET

The following field notes describe the remonumentation of the corner of sections 26, 27, 34, and 35, township 2 south, range 34 east, of the Willamette Meridian, Oregon, as provided for in the Special Instructions dated February 22, 2002, under Group 2000, Oregon.

The remonumentation was made at the request of the Bureau of Indian Affairs, Umatilla Agency.

The new bearing tree has a 2½ inch x ¼ inch magnetic nail (Mag-Nail) driven at the base on the right side-center.

The mean magnetic declination as taken from U.S. Geological Survey 7½ minute quadrangle map "BALLY MOUNTAIN, OREG.", dated 1967, and photorevised in 1984, is 19° East.

Remonumentation of the Corner of Sections 26, 27, 34, and 35, T. 2 S., R. 34 E., Willamette Meridian, Oregon

(Rehabilitating a corner established by James P. Currin and James E. Nolan, U.S. Deputy Surveyors, in 1887, and remonumented by Richard L. Johnson, Cadastral Surveyor, in 1987-89)

The cor. of secs. 26, 27, 34, and 35, monumented with a magnet in a white plastic case, firmly set, 25 ins. in the ground, from which an original bearing tree

A larch, 32 ins. diam., bears N. 62° E., 51.4 ft. dist., no marks visible on an opened blaze. (Record, N. 60¾° E., 51.8 ft.)

and the remains of bearing trees mkd. by Johnson

A fir, 23 ins. diam., bears S. 26° E., 98.8 ft. dist., with fragmentary scribe marks visible on a partially healed blaze. (Record, 99.7 ft.)

A fir, 12 ins. diam., bears S. 45° W., 69.8 ft. dist., with a healed blaze. (Record, S. 42½° W., 70.3 ft.)

A roothole, bears N. 36½° W., 13.9 ft. dist., with an uprooted fir snag alongside, 12 ins. diam., with scribe marks T2S R34E S27 BT visible on an open blaze. (Record, N. 39½° W.)

T2S34V17

UNION COUNTY SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By JLL DEPUTY

File No. Z59-2013R


Remonumentation of the Corner of Sections 26, 27, 34, and 35,
T. 2 S., R. 34 E., Willamette Meridian, Oregon

FEET

The stainless steel post set by Johnson was found laying on top of the ground in the area.

At the corner point

Reset the stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, directly over the magnet, with brass cap mkd.



from which a new bearing tree

A larch, 9 ins. diam., bears N. 53½° W., 32.8 ft. dist.,
mkd: T2S R34E S27 BT.

Corner is located 20 ft. North of a gravel road, 15 ft. wide,
bears N. 55° W. and S. 55° E.

UNION COUNTY
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] DEPUTY

File No. 259-2013R