




United States Department of the Interior

BUREAU OF LAND MANAGEMENT
OREGON STATE OFFICE
P.O. BOX 2965 (825 NE MULTNOMAH STREET)
PORTLAND, OREGON 97208



RECEIVED

OCT 25 1988

October 21, 1988

Mr. Howard Perry
Union County Surveyor
P.O. Box 1107
LaGrande, OR 97850

Dear Sir:

The enclosed diagram(s) indicate cadastral survey field work completed by this office from October 1987 through September 1988.

The diagram(s) are for informational purposes only. The final field notes and plat have not yet been prepared. If you need any information on any of these surveys, please feel free to contact this office at (503) 231-6987.

Sincerely,


Wayne M. Gardner
Chief, Branch of Cadastral
Survey

Enclosures (as stated)

X-10

U.S. DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

TOWNSHIP DIAGRAM*

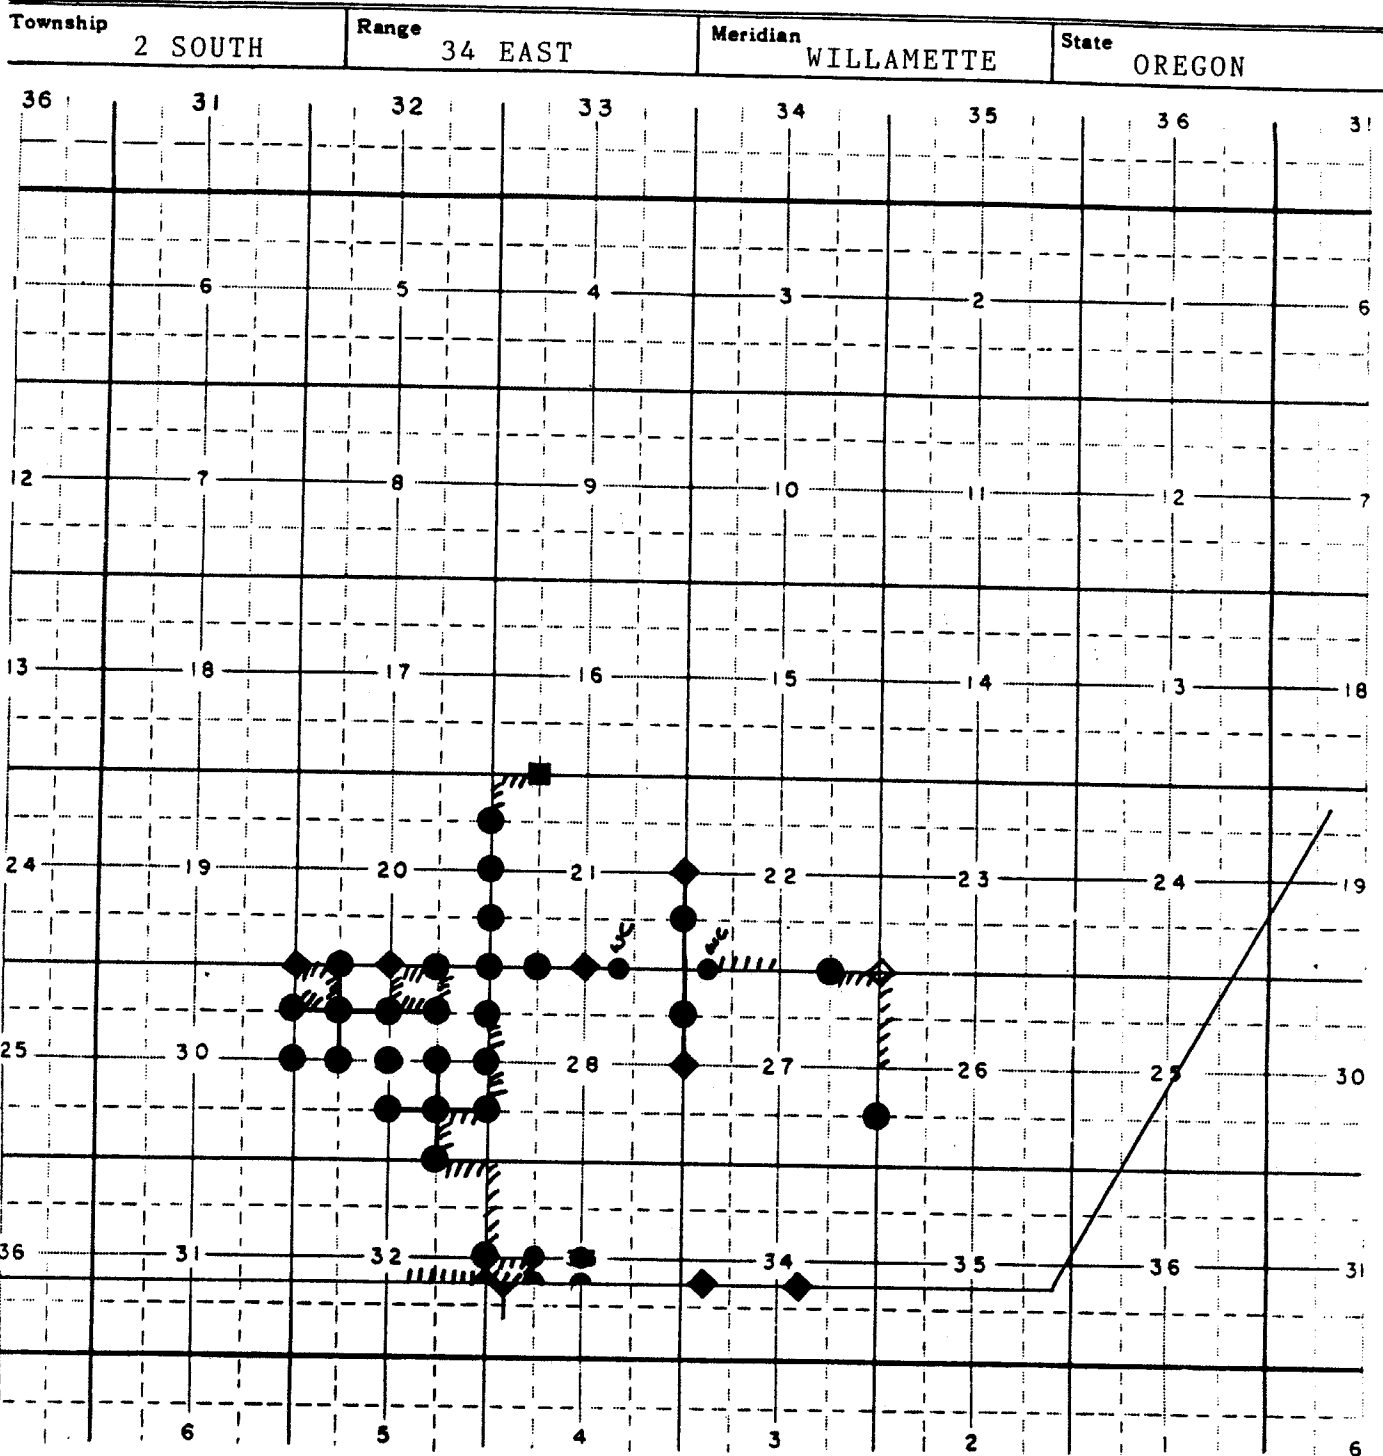

Field Work Completed During FY 1988

For the Bureau of Indian Affairs,

Umatilla Indian Reservation,
Umatilla and Union Counties, Oregon

- Resurveyed or Surveyed line 3½ Miles Resurveyed or Surveyed
 - ◊ Original Corner, previously remonumented 42 Monuments set
 - ◆ Original Corner, remonumented this survey
 - Corner established this survey Group 1343, Oregon
 - ||||| Reservation boundary posted by Richard L. Johnson
- Survey from 10/1/87 to 6/13/88

Subdivision of Section 33,
T. 2 S., R. 34 E., Willamette Meridian, Oregon

UNION COUNTY, OREGON
SURVEYOR

Date Received 3/8/13

Date Filed 3/8/13

By [Signature] DEPUTY

File No. 235-2013R

The corner is located on E. slope.

From this point, the 65 Mile Corner on the S. bdy. of the Umatilla Indian Reservation, bears N. 89° 48' 00" E., 5.630 chs. dist., hereinbefore described.

From the 1/4 sec. cor. of secs. 33 and 34.

N. 88° 51' 00" W., on the E. and W. center line of sec. 33.

Over level ground.

14.00 Descend steep E. slope, through moderate timber.

28.90 McCoy Creek, 15 lks. wide, course S. 20° E.

40.430 The center 1/4 sec. cor. of sec. 33.

59.90 Ravine, drains N. 40° E.

60.335 Point for the center W 1/16 sec. cor. of sec. 33.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.

C W 1/16 C
S 33
1987

T2S34
X10

from which

A larch, 19 ins. diam., bears N. 49 1/2° E., 37 lks. dist., mkd. CW 1/16 S33 BT.

A fir, 10 ins. diam., bears S. 78 1/2° W., 48 lks. dist., mkd. CW 1/16 S33 BT.

Deposit a white "DEEP-1" magnetic marker at the base and set a steel fence post alongside the stainless steel post.

67.10 Spur, slopes N.; desc. NW. slope.

80.240 The 1/4 sec. cor. of secs. 32 and 33.

From the center W 1/16 sec. cor. of sec. 33.

S. 0° 06' 30" W., on the N. and S. center line of the SW 1/4 of sec. 33, on a mean bearing of the E. and W. bdrs. of the SW 1/4 of sec. 33, for that portion of the section north of the S. bdy. of the Umatilla Indian Reservation.