

15 SEPT 1987

T25, R35E

FOUND.  
NE B.T.  
NW B.T.  
SE B.T.

43  
910

SEVERAL LOCATION TAGS F3 SP, B42.  
Diob. Hammer

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>1-4-88</u>
Date Filed	<u>1-7-88</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>09-88R</u>

E-13

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


E-13

**History of original corner establishment:**

Original corner established by Rufus S. Moore on September 25, 1882, under contract number 151, as follows:

Set a basalt stone 30" x 15" x 8", 24" into the ground marked with 5 notches on the south and 3 notches on the east, from which:

- A 24" fir bears S15°E, 17 links (11.25 feet).
- A 26" fir bears S15°W, 38 links (25.08 feet).
- A 32" pine bears N13°E, 31 links (31.02 feet).
- A 15" pine bears N11°E, 55 links (36.30 feet).

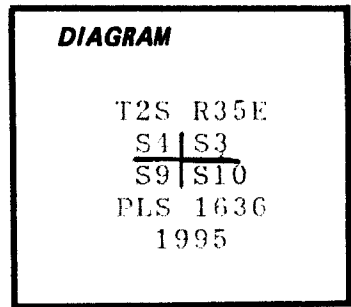

**Description of corner evidence found:**

The corner stone is gone, most likely having rolled down the steep south facing hillside.  
 The original 15" pine is a 24" Ponderosa Pine with a healed blaze. Bears N16°E, 36.3 feet.  
 The original 32" pine is a 30" Ponderosa Pine with a healed blaze. Bears N12°30'W, 31.0 feet.  
 The original 24" fir is a 26" Douglas-fir with a healed blaze. Bears S18°E, 11.2 feet.  
 The original 26" fir is a down and decayed Douglas-fir. No marks remain. Root hole bears S15°W, 25.1 feet.

**Description of monument and accessories established to perpetuate the original location of this corner:**

At the corner point as determined by reference to the original bearing trees, I set a 1" x 30" galvanized iron pipe 28" into the ground. A 2 1/2" brass cap attached is marked as shown in the diagram above, from which:

A 9" Douglas-fir, scribed "T2S R35E S9 PT" on double blazes, bears S51°W, 18.4 feet. A 5/8" brass washer, marked "PLS 1636", is nailed flush to the lower blaze and a bearing tree sign is nailed above the blazes.

This corner is 2' west of a north-south barbed wire fence.

I hereby certify the above corner point was perpetuated as hereon described on August 18, 1995. Magnetic declination: 18°E.

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Dennis L. Gaylord*

**OREGON**  
JULY 14, 1978  
**DENNIS L. GAYLORD**  
1636

*Renews 6/30/1997*

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

Date Received 8/21/95

Date Filed 8/31/95

By *[Signature]*

File No. 016-1995R