

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Rufus S. Moore under GLO contract Number 451, dated June 12, 1882. Surveyor General record states:
Set basalt stone 12x10x8 ins. 8" in ground raised mound of stone, from which:
A Fir 40" dia. bears N69°W, 159 lks.


Survey 11-82 calls finding rotted fir stump and mound of stone at GLO record bearing and distance from stump. A 5/8" iron pin with aluminum was set in the mound of stone, from which:

A 18" fir S3½°E, 68.4' to center scribed T2S R35E S11 BT.

A 14" fir S28°W, 76.2' to center scribed T2S R35E S10 BT. This tree is the larger of a double 14" and 10".

A 23" fir N43°W, 106.5' to center scribed T2S R35E S3 BT RS691.

A 6" pine N21°E, 146.8' to center scribed T2S R35E S2 BT.

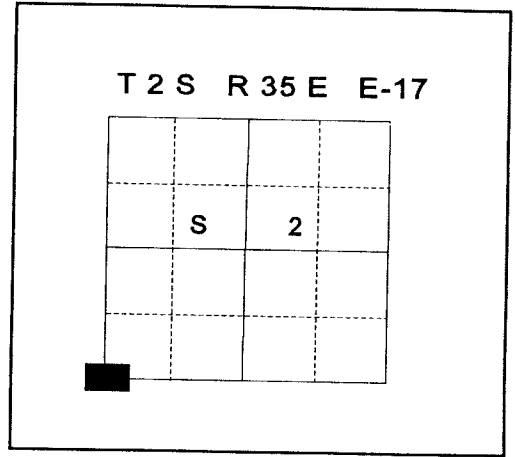

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found 5/8" iron pin with 1½" aluminum cap stamped OREGON STATE PARKS in mound of stone, from which:

An alive and vigorous 7" Ponderosa Pine bears N21°E, 146.8 feet to the center with scribes partially visible.

A 18" Fir stump bears S3°E, 68.4 feet to the center with scribes partially visible.

A 14" double boled Fir stump bears S28°W, 76.2 feet to the center with scribes partially visible.

An alive and vigorous 23" Fir bears N43°W, 106.5 feet to the center with scribes partially visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of the found 5/8" iron pin with aluminum cap, I set a 2½" x 30" aluminum pipe with 2½" aluminum cap marked as shown below, 18" in the ground, with a mound of stone 3' diameter, from which:

A 5/8" x 30" iron pin with 1½" aluminum cap bears S88°E, 22.98 feet, marked UNION COUNTY SURVEYOR SE RP with small mound of stone.


A 15" Ponderosa Pine bears S37°W, 56.54 feet, marked T2S R35E S10 BT.

I hereby certify that the corner was monumented on July 5, 1996.

Witness: Mark Durbin, Jeff Madsen

REGISTERED PROFESSIONAL LAND SURVEYOR
Gregory T. Blackman
OREGON JULY 19, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1997

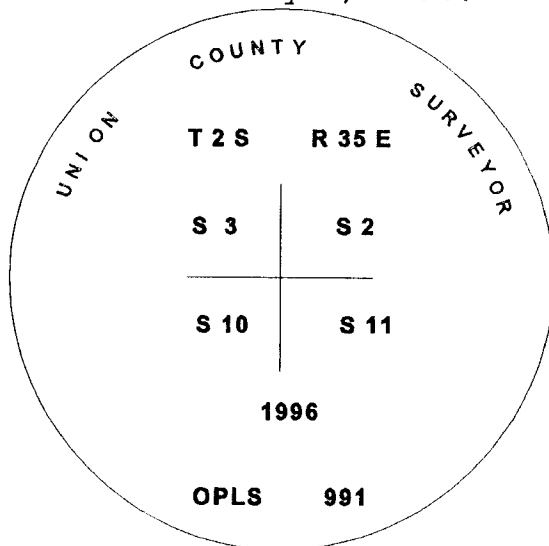

UNION COUNTY SURVEYOR
Date Received 7-23-96
Date Filed 7-23-96
Filed By R. ROBINSON, DEPUTY
File Number OBC-1996R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing tree and to the center of the aluminum cap on the new bearing object.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200314

CORNER COMMON TO SECTIONS: 2, 3, 10 & 11

TWP. 2 S. RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: July 2003

LAT: 45 ° 24 ' 51.20329 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 24 ' 29.27618 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 644066.442 INT FT.

E: 8739207.178 INT FT.

TYPE: GPS

THETA: 1 ° 29 ' 0.68403088 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999037439

ELEV: 4495.45 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 ½" aluminum monument
Approximately 100 feet West of access road.

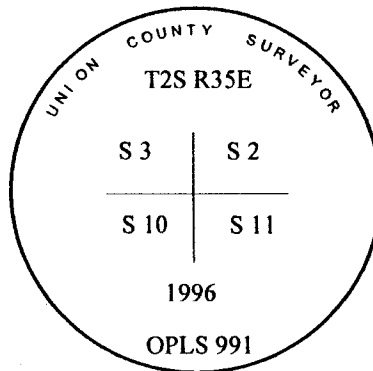

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)