

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:


Corner originally established by Rufus S. Moore under GLO Contract Number 451, dated June 12, 1882.

Surveyor General record states:

Set a post 4 ft. long, 4 ins. sq., 24 ins. in the ground for secs. 1, 2, 11 & 12. Marked T2S R35E S1 on NE, T2S R35E S2 on NW, S11 on SW, and S12 on SE with 5 notches on South, and 1 on East edge. From which:

- A Fir 5 ins. in diam. bears N 7° E, 29 lks dist. marked T2S R35E S1 BT.
- A Tamarack 10 ins. in diam. bears N 55° W, 35 lks dist. marked T2S R35E S2 BT.
- A Pine 10 ins. in diam. bears S 18° W, 40 lks dist. marked T2S R35E S11 BT.
- A Pine 8 ins. in diam. bears S 23° E, 57 lks dist. marked T2S R35E S12 BT.

T 2 S R 35 E E-21



DESCRIPTION OF CORNER EVIDENCE FOUND:

A iron pin with a 1 1/2" aluminum cap, set by Survey Number 11-82, bears N 1° W, a distance of 13.70 feet, marked OREGON PARKS. No remains of original GLO corner evidence found.

SEE SURVEY NUMBER 016-2014

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At a proportionate position, I set a 2 1/2"x30" aluminum pipe with a 2 1/2" aluminum cap 24" in the ground marked as shown with mound of stone 1.5' base to top of cap from which:

- A 5" Western Larch bears N 66° E, a distance of 26.18 feet, marked X BT.
- A 13" Douglas Fir bears S 23° E, a distance of 26.80 feet, marked T2S R35E S12 BT.
- A 7" Douglas Fir bears S 48° W, a distance of 27.07 feet, marked T2S R35E S11 BT.

I hereby certify that the corner was monumented on May 22, 2014.


Witness: Thomas J. Kopp

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2015

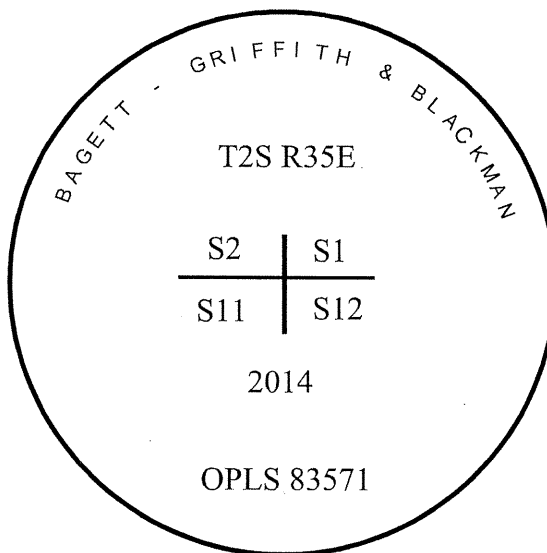

**UNION COUNTY
SURVEYOR**

Date Received 5/29/14

Date Filed 5/29/14

Filed By WAGM

File Number 018-2014R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 16° East declination, the distances are to a 60d spike driven into the right side of the root crown of the new bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.