


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-17

History of original corner establishment:

Set a post, 4 ft. long, fins in diam from which.  
 A pine, 10 ins diam, bears N38°E, 17lks. dist marked;  
 T2S, R35E S11 BT;  
 A pine, 7 ins diam, bears N 16°W, 11lks dist marked;  
 T2S R35E S10 BT;  
 A pine, 8 ins diam. bears S50°W.; 10lks. dist marked;  
 T2S, R35E S15 BT;  
 A pine, 9 ins diam. bears S38°E. 47 lks Dist marked;  
 T2S , R35E S14 BT;



Description of corner evidence found:


A pine stump with scribe bears N38°E 17 lks;  
 A pine, 9' in diam. bears S38°E 47 lks dist. with scribe. ( very poor condition.)

Description of monument and accessories established to perpetuate the original location of this corner

At the position of the corner set a pipe with 2" brass cap and marked as shown.

From position of the corner the following bearing trees were set;

White fir 12" in diam bears N38°W a distance of 21.8 ft. marked T2S R35E S10 BT;  
 Red Fir 11' in diam bears N21°E a distance of 24.8 ft.; marked T2S R35E S11 BT;  
 White fir 10" in diam. bears S42°W a distance of 9.2 ft.; marked T2S R35E S15BT;  
 White fir 10 " diam bears S51°E a distance of 7.8 ft.; marked T2S R35E S14BT;.

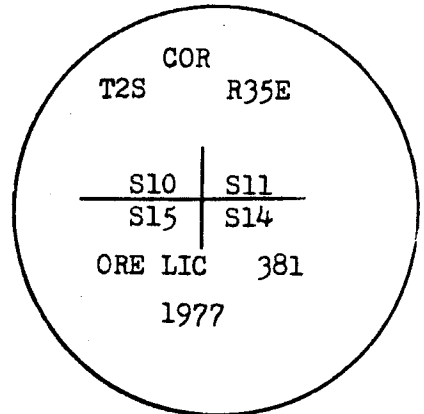

Office of James G. Voelz County of Union  
 State of OREGON hereby certify that the within instrument was filed in this office  
 for record on the 27th day of Jan 1977.  
 \_\_\_\_\_ by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)

OREGON  
 MAY 4, 1956  
 JAMES G. VOELZ  
 381


<b>UNION COUNTY SURVEYOR</b>	
Date Received _____	
Date Filed _____	
By _____	
File No. <u>199-84R</u>	

**UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Rufus S. Moore, under GLO contract #451, dated June 12, 1882. GLO record states:  
Set a post 4 ft. long, 4 ins. square, 24" in the ground, from which:

- A pine, 10 ins. diam., bears N38°E., 17 lks. dist., mkd. T2S R35E S11 BT.
- A pine, 7 ins. diam., bears N16°W., 18 lks. dist., mkd. T2S R35E S10 BT.
- A pine, 8 ins. Diam., bears S50°W., 10 lks. dist., mkd., T2S R35E S15 BT.
- A pine, 9 ins. diam., bears S38°E., 47 lks. dist., mkd. T2S R35E S14 BT.

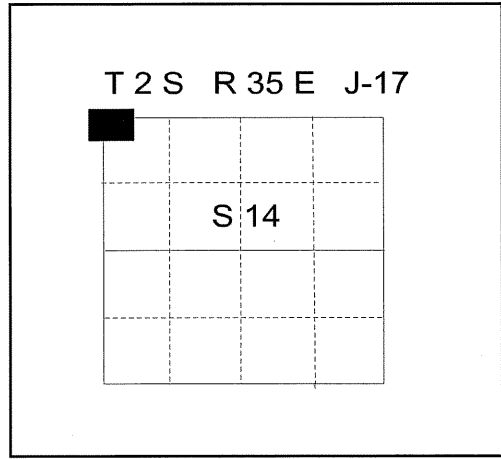

In 1984, James G. Voelz set a pipe with 2 1/2" Brass cap from found evidence:  
A pine stump with scribe bears N38°E 17 lks.  
A pine, 9 ins. diam., bears S38°E., 47 lks. dist., with visible scribe.

**And takes new accessories:**

- A 12" White fir bears N38°W, a distance of 21.8 ft., marked T2S R35E S10 BT.
- A 11" Red fir bears N21°E, a distance of 24.8 ft., marked T2S R35E S11 BT.
- A 10" White fir bears S42°W, a distance of 9.2 feet, marked T2S R35E S15 BT.
- A 10" White fir bears S51°E, a distance of 7.8 feet, marked T2S R35E S14 BT.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found 2 1/2" Brass cap on 1 1/2" iron pipe, set 4 ins. above ground, from which:

- A fir stump bears S51°E, a distance of 8.2 feet, with visible scribe.
- A fir stump bears N14°E, a distance of 25.3 feet, with visible scribe.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**


**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

**NEW BEARING TREES:**

- A 6" diameter Lodgepole pine bears North 18° East, a distance of 15.70 feet, marked T2S R35E S11 BT.
- A 6" diameter Lodgepole Pine bears South 43° East, a distance of 36.80 feet, marked T2S R35E S14 BT.
- A 7" diameter White Fir bears North 80° West, a distance of 42.60 feet, marked T2S R35E S10 BT.
- A 4" diameter Douglas Fir bears North 41° West, a distance of 26.70 feet, marked X BT.


I hereby certify that the corner was perpetuated on September 23, 2008.  
Witness: Gregory Blackman Jr., Jeff Hsu

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR



OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

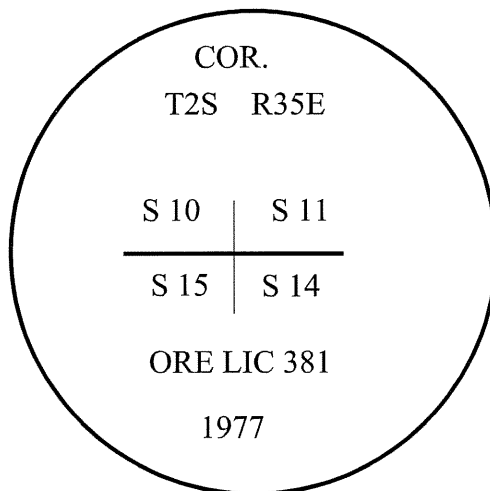

**UNION COUNTY  
SURVEYOR**

Date Received 10/16/08

Date Filed 10/16/08

Filed By [Signature]

File Number 015-2008R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 2219 to the BT blaze.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200801

SECTION CORNER COMMON TO SECTIONS: 10, 11, 14 and 15

TWP. 2 S. RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 23, 2008

LAT: 45 ° 23 ' 58.17665 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 24 ' 29.57416 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 638697.326 INT FT.

E: 8739324.960 INT FT.

TYPE: GPS

THETA: 1 ° 29 ' 0.4727071 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999026768

ELEV: 4471.23 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is 2" iron pipe 4 inches above the ground  
with 3" brass cap marked as shown:

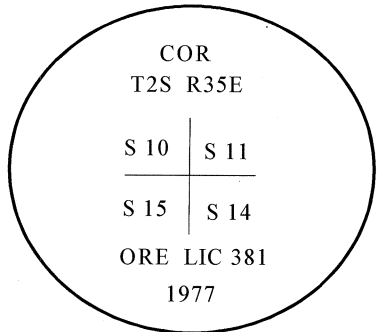

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)