

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner originally established by Rufus S. Moore, under GLO contract #451, dated June 12, 1882. GLO record states:

Set a post 3 ft. long, 3 ins. square, 24" in the ground, from which:

A fir, 6 ins. diam., bears S77°E., 19 lks. dist., mkd. 1/4 SBT.

A pine, 6 ins. diam., bears S37°W., 22 lks. dist., mkd. 1/4 SBT.

DESCRIPTION OF CORNER EVIDENCE FOUND:
No original evidence found.

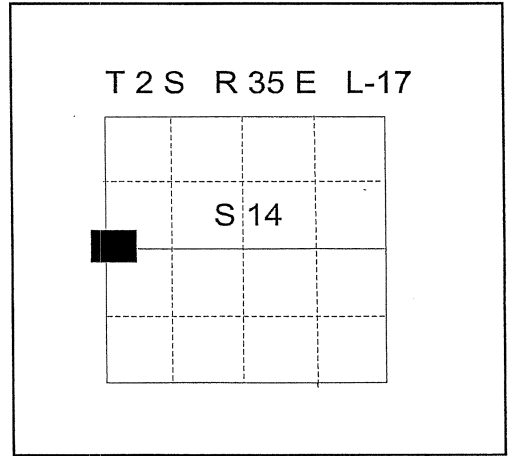

See Survey Number 030-2008

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set an 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap, from which:

NEW BEARING TREES:

A 7" diameter Western Larch bears North 58° East, a distance of 54.82 feet, marked 1/4 S14 BT.

An 8" diameter White Fir bears South 10° East, a distance of 14.70 feet, marked 1/4 S14 BT.

A 9" diameter Western Larch bears South 83° West, a distance of 185.25 feet, marked 1/4 S15 BT.

A 7" diameter White Fir bears North 31° West, a distance of 54.93 feet, marked 1/4 S15 BT.

I hereby certify that the corner was monumented on September 17, 2008.
Witness: Jeff Hsu

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2008

BAGETT - GRIFFITH & BLACKMAN
T2S R35E
1/4
S15 | S14
2008
OPLS 2219

UNION COUNTY
SURVEYOR
Date Received 10/6/08
Date Filed 10/6/08
Filed By J. G. [Signature]
File Number 016-2008R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 2219 to the BT blaze.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200802

1/4 SECTION CORNER COMMON TO SECTIONS 14 and 15

TWP. 2 S. RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 17, 2008

LAT: 45 ° 23 ' 31.67711 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 24 ' 29.26330 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 Adams Avenue
La Grande, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 636015.019 INT FT.

E: 8739416.614 INT FT.

TYPE: GPS

THETA: 1 ° 29 ' 0.69316621 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999021683

ELEV: 4485.65 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is a 2 1/2"x30" aluminum pipe
with 2 1/2" aluminum cap marked:

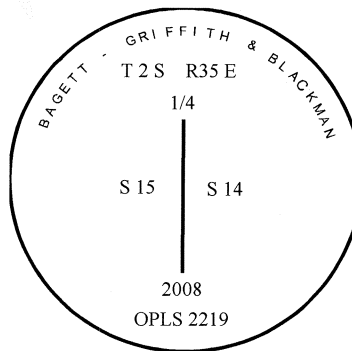

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)