

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Rufus S. Moore, under GLO contract #451, dated June 12, 1882. GLO record states:


Set a basalt stone 15"X8"X7", from which:

A pine, 12 ins. diam., bears S30°E., 99 lks. dist., mkd. 1/4 SBT.

A pine, 6 ins. diam., bears N55°W., 78 lks. dist., mkd. 1/4 SBT.

DESCRIPTION OF CORNER EVIDENCE FOUND:

No original evidence found.

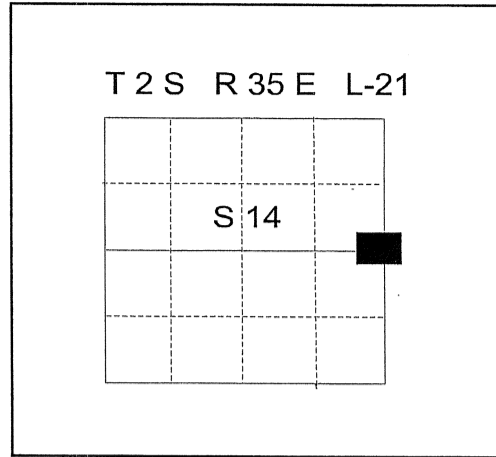

See Survey Number 030-2008

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set an 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap 22" in the ground in mound of stone 1 ft. base to top of cap, from which:

NEW BEARING TREES:

A 12" diameter Douglas Fir bears North 33° East, a distance of 9.35 feet, marked 1/4 S13 BT.


A 6" diameter Ponderosa Pine bears South 39° East, a distance of 34.85 feet, marked 1/4 S13 BT.

A 10" diameter Douglas Fir bears South 83° West, a distance of 62.70 feet, marked 1/4 S14 BT.

A 7" diameter Ponderosa Pine bears North 46° West, a distance of 23.00 feet, marked 1/4 S14 BT.

I hereby certify that the corner was monumented on September 22, 2008.
Witness: Greg Blackman Jr., Jeff Hsu

REGISTERED
PROFESSIONAL
LAND SURVEYOR



OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2008

BAGETT - GRIFFITH & BLACKMAN

T2S R35E
1/4
S14 | S13
2008
OPLS 2219

UNION COUNTY
SURVEYOR

Date Received 10/6/08
Date Filed 10/6/08
Filed By Greg K. Hsu
File Number 013-2008R

I used a steel tape and magnetic compass in the establishment of the new accessory. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 2219 to the BT blaze.