


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. N-17

History of original corner establishment:

In 1882 under GLO contract No. 451 Rufus Moore set a basalt stone 16"x10"x10" 11 inches in the ground for Corner to Sec 14, 15, 22, 23 with 3 notches on south and 2 notches on east edge from which:

- A Fir 6" in dia. bears N 55° E 47 lks marked T2S R35E S14 BT.
- A Fir 20 in dia. bears N 67°W 67 lks marked T2S R35E S15 BT
- A Fir 5" in dia. bears S51°W 67 lks marked T2S R35E S 22BT
- A Fir 15" in dia. bears S55°E 28 lks marked T2S R35E S23 BT

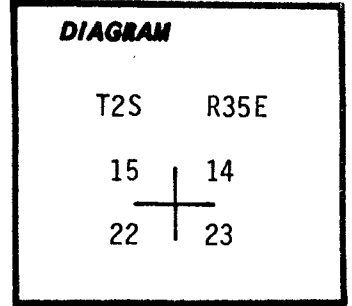

Description of corner evidence found:

FOUND: A basalt stone 16"x10"x10" 8 inches in the ground with 2 notches on east edge from which:

- An 8" Fir bears N55° E 31.0 ft. with visible scribing "T S R35 E S14"
- No evidence of other BT's.


Description of monument and accessories established to perpetuate the original location of this corner:

At the location of the found corner stone, we set a 2"x30" Galvanized Iron Pipe, 8" in the ground and supported in a mound of stone, with brass cap, marked:

Bury the found stone alongside the new monument and mark the following new BT's:

- A 6" White Fir bears S 66° W 9.2 ft. scribed T2S R35E S22 BT.
- A 10" White Fir bears N53°W 29.6 ft. scribed T2S R35E S15 BT.
- A 12" Douglas Fir bears N69°E 47.8 ft. scribed T2S R35E S14 BT
- A 12" White Fir bears S76° E 26.1 ft. scribed T2S R35E S23 BT.

T2S R35E



1981


OR PLS 1099

We painted all blazes and ring around the trees. Attached 54-3, 54-4 to all BT's and tacked brass washers No. 1099 to foot blazes, Set a metal fencepost 5 ft. north of corner with a 54-4 sign.

Compass Declination: 18 1/2° East

I hereby certify the above described monument and/or accessories was established as described on October 1, 1981.

Witnesses: Loren Huntsman
Jess Anderson
Millard Wyatt

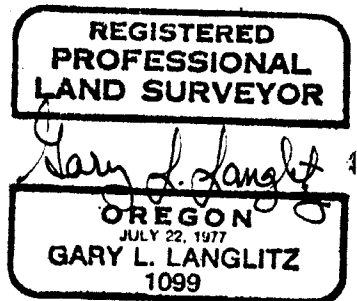

Office of... SURVEYOR..... County of..... Union.....
 State of..... Oregon..... I hereby certify that the within instrument was filed in this office
 for record on the... 4... day of... OCTOBER..... 1982
Howard L. Perry..... by Gary L. Langlitz
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR


Date Received _____
 Date Filed _____
 By _____
 File No. 203-84 R

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


File Index N - 17

History of original corner establishment:

In 1882, Rufus S. Moore, under contract 451, set a basalt stone 16x10x10 11 ins. in the ground, for the cor. of secs. 14, 15, 22 & 23, with 3 notches on south and 2 notches on east edge. From which:
 A Fir 6 ins. in dia. bears N55°E, 47 lks. dist., mkd. T2S R35E S14 BT.
 A Fir 15 ins. in dia. bears S55°E, 28 lks. dist., mkd. T2S R35E S23 BT.
 A Fir 5 ins. in dia. bears S51°W, 67 lks. dist., mkd. T2S R35E S22 BT.
 A Fir 20 ins. in dia. bears N67°W, 67 lks. dist., mkd. T2S R35E S15 BT.
 In 1981, Gary L. Langlitz, P.L.S. 1099, states:
 At the location of the found cor. stone, Set a galvanized iron pipe, 30 ins. long, 2 1/2 ins. diam., 8 ins. in the ground, supported in a mound of stone, with brass cap mkd.
 From which:

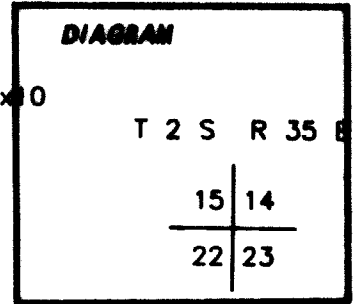

A Douglas Fir 12 ins. in dia. bears N69°E, 47.8 ft. dist., mkd. T2S R35E S14 BT.
 A White Fir 12 ins. in dia. bears S76°E, 26.1 ft. dist., mkd. T2S R35E S23 BT.
 A White Fir 6 ins. in dia. bears S66°W, 9.2 ft. dist., mkd. T2S R35E S22 BT.
 A White Fir 10 ins. in dia. bears N53°W, 29.6 ft. dist., mkd. T2S R35E S15 BT.




Description of corner evidence found:

Found:

A galvanized iron pipe, 12 ins. above top of mound, 2 1/2 ins. diam., with brass cap mkd. Mound is 3 ft. base by 2 ft. high. From which

A Fir snag, 6 ins. in dia. bears N55°E, 30.7 ft. dist., mkd. 2S R35E S14 visible.
 A Fir snag, 17 ins. in dia. bears N67°W, 44.2 ft. dist., with healed double blaze.
 A Douglas Fir 8 ins. in dia. bears N69°E, 47.5 ft. dist., mkd. T2S R35E S14 BT.
 A White Fir snag, 8 ins. in dia. bears S76°E, 26.1 ft. dist., mkd. T2S R35E S23 BT.
 A White Fir 6 ins. in dia. bears S66°W, 9.2 ft. dist., mkd. T2S R35E S22 BT, crown dead.
 A White Fir snag 10 ins. in dia. bears N53°W, 29.6 ft. dist., mkd. T2S R35E S15 BT.



1982
OR PLS 1099

1982
OR PLS 1099

Description of monument and accessories established to perpetuate the original location of this corner:

From the 1981 monument I marked new references

A Douglas Fir, 13 ins. diam., bears S58°E, 33.4 ft. dist., mkd. T2SR35ES23 BT.

A White Fir, 7 ins. diam., bears S42°W, 45.7 ft. dist., mkd. T2SR35ES22 BT.

The trees are double blazed, with a brass washer, mkd. LS 2211, nailed between the B & T.

Tools used; hand compass (declination 19.5° East) and a 200 ft. Kesson tape.

Crew members: Earl E. Strang, Tracy R. Patterson & Roger O. Green

I hereby certify the above corner point was perpetuated as hereon described, on July 28, 1993.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Roger O. Green

OREGON
JULY 17, 1988
ROGER O. GREEN
2211

Roger O. Green, LS 2211, Forest Service Land Surveyor
3502 Highway 30, La Grande, Oregon, 97850

SEALED: 8/3/93

Office of..... County of.....

State of..... I hereby certify that this instrument was filed in this office for record on the..... day of.....

..... by
(COUNTY OFFICIAL)

JACKSON COUNTY CLERK	
(DEPUTY)	
Date Received	11/19/93
Date Filed	12/14/93
By	<i>Hugh T. O'Leary</i>
File No.	052-1993R

Form R6-7100-57 (9/71)

*GPO-501-971, 1988

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200804

SECTION CORNER COMMON TO SECTIONS: 14, 15, 22 and 23

TWP. 2 S. RGE. 35 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: September 23, 2008

LAT: 45 ° 23 ' 5.17987 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 24 ' 28.95043 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 633332.954 INT FT.

E: 8739508.411 INT FT.

TYPE: GPS

THETA: 1 ° 29 ' 0.91504802 "

ORDER: SECOND CLASS: 1



SCALE FACTOR: 0.9999016764

ELEV: 4462.18 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" iron pipe in mound of stone
with 3" brass cap marked as shown:

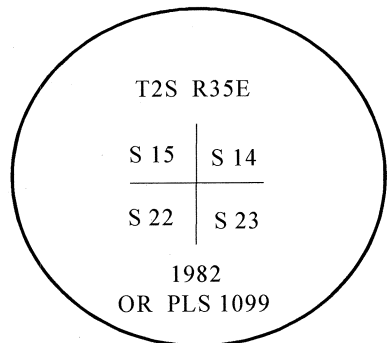

Renewal Date: December 31, 2008

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)