

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by John A. Hurlburt under GLO contract number 201, dated August 5th, 1873. Surveyor General Record states:

Set a Pine Post 4ft long, 3in thick, 2ft in ground for $\frac{1}{4}$ corner. From which;

- A 20" dia. Pine bears N68°W, 44 lks.
- A 24" dia. Fir bears N70°E, 48 lks.

Survey 11-82 placed the corner by proportion. A 5/8" iron pin with aluminum cap marked OREGON STATE PARKS was set at corner.

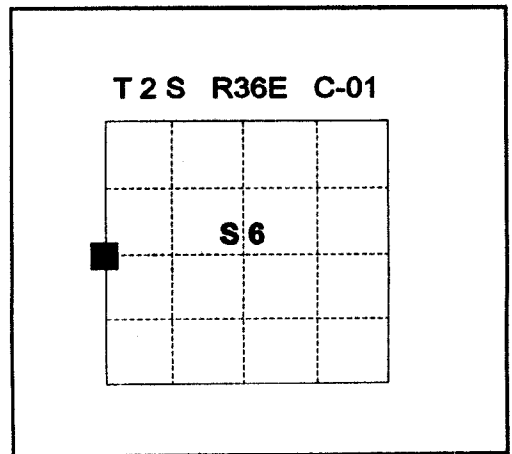

DESCRIPTION OF CORNER EVIDENCE FOUND:

- A 5/8" rebar with 1 1/2" aluminum cap stamped OREGON STATE PARKS.
- A 18" Tamarack snag bearing S29°E, 9.50 feet, blazed and scribed.
- A 17" Tamarack bearing S28°W, 39.91 feet, blazed scribing not visible, alive and vigorous.

See Union County Survey Number 043-1995.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown in place of existing monument, 27 inches in the ground, from which;

NEW BEARING TREES:

- A 8" Tamarack bears N37°E, 47.77 feet, marked X BT.
- A 11" Tamarack bears S23°E, 39.21 feet, marked T2S R36E S6 BT.
- A 8" White Fir bears N55°W, 16.43 feet, marked T2S R35E S1 BT.


I hereby certify that the corner was monumented on October 9, 1995.
Witness: Mark Durbin, Jeff Madsen

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 13, 1973

GREGORY T. BLACKMAN
991

Renewal Date: December, 31 1995

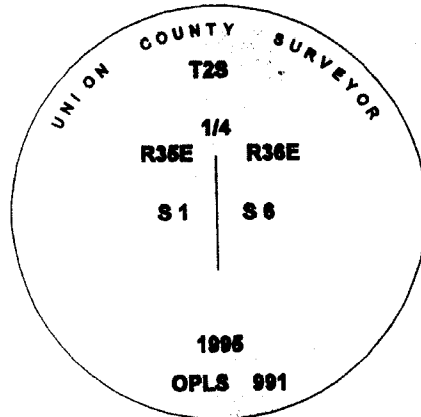

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the root crown of the bearing tree.

**UNION COUNTY
SURVEYOR**

Date Received 11-13-95

Date Filed 11-13-95

Filed By A. Peterson, Deputy

File Number 033-1995R