

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


C-5

History of original corner establishment:

Corner established in 1895 by Marius Buchunure under General Land Office contract number 168.

Surveyor General record states:

Set post for 1/4 corner from which:  
A tamarack 20 in. dia. bears N47E, 62 1/2 links  
A tamarack 20 in. dia. bears S38 1/2 W, 17 links

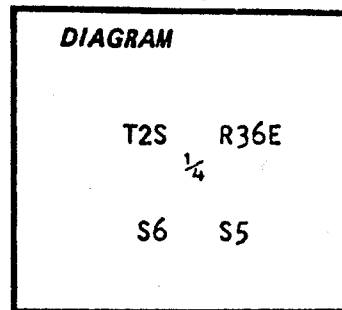

No record of subsequent remonumentation was found in county records.

Description of corner evidence found:

Original BTs

- A 17 inch tamarack stump N74E, 41.7 feet scribes visible.
- A 18 inch tamarack stump S41W, 11.5 feet bottom of blaze visible, no scribes.


See map of survey dated 5/19/80

Description of monument and accessories I established to perpetuate the original location of this corner:

At mean bearing and distance from BTs I set a 2 1/2 inch x 30 inch iron pipe with brass cap marked as shown, 26 inches in the ground.  
From which:

NEW BTs

- A 14 inch tamarack bears S46E, 25.9 feet marked 1/4 S5 BT
- A 9 inch lodge pole pine bears S56W, 33.4 feet marked 1/4 S6 BT
- Raised mound of stone

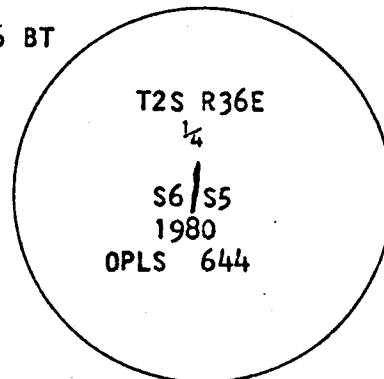

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Handwritten signature of Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Brass washer nailed to B.T. blaze.  
Used steel tape and magnetic  
compass with 20° east declination  
Measured to center of B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

---

Date Received \_\_\_\_\_

★ GPO-764-276

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 227-84 R