

5-70A

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-3

History of original corner establishment:

The original corner established by General Land Office contract survey


The original notes state;

East on true line between Secs 6 and 7.

Set a post for $\frac{1}{4}$ sec corner from which;

Pine 23" in dia bears N33°E 141 lks dist marked $\frac{1}{4}$ SBT;

Pine 6" in dia bears S82 $\frac{1}{2}$ °E 131 lks dist marked $\frac{1}{4}$ SBT;



Description of corner evidence found:

A ponderosa pine 26" in diam bears N33°E 141 lks with scribe visible and tree alive and in good shape. No other evidence was found.

Description of monument and accessories I established to perpetuate the original location of this corner


At the position of the corner I set a 30" galvanized pipe with an eight inch plate welded to bottom and bronze cap on top. The hole back filled with stone and tamped soil and raised a stone monument around pipe.

I stamped the disk

From the monument the original bearing tree is
A ponderosa pine 26" in diam bears N33°E 141 lks marked $\frac{1}{4}$ SBT;

I established the following new bearing tree;

A ponderosa pine 15" in diam bears S69°E 75.5 ft marked $\frac{1}{4}$ SBT; Distance measured to center of tree on level. I placed bearing tree signs on both old and new bearing trees and corner locating sign. I painted stripes around bearing trees. I placed steel fence post with USFS sign 54-4 attached near the corner.

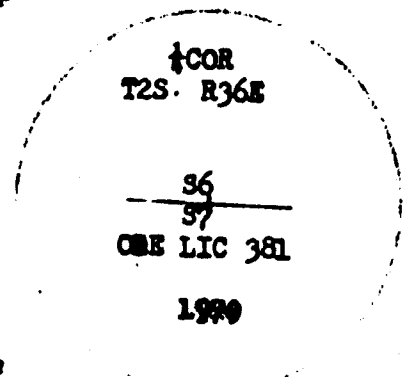

Office of.....County surveyor..... County of.....Union

State of.....Oregon....., I hereby certify that the within instrument was filed in this office for record on the 18 day of July 1970, at 1 o'clock P.M. (signed)

County surveyor by [Signature] (COUNTY OFFICIAL)

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 229-84 R

CELESTIAL RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT :

Corner originally established by Marius Buchanan in GLO Contract No. 635, dated April 19, 1895.. Surveyor General record states:

Set a Tamarac post 3 ft. long, 3 ins. square, 25 ins. in the ground for 1/4 sec. cor. marked 1/4 S. on N. face, from which,

A pine 23 ins. bears N. 33° E., 141 lks. dist. marked 1/4 S. BT.

A pine 6 ins. diam. bears S. 82 1/2° E., 131 lks. dist. marked 1/4 S. BT.

In July 1970, Union County Surveyor James Voelz, set a monument at record position from the Northeast bearing tree. Monumentation record 229-84R states:


I set a 30" galvanized pipe with an eight inch plate welded to bottom and bronze cap on top. From the monument the original bearing tree is:

A ponderosa pine 26" in diam bears N33°E 141 lks marked 1/4 SBT.

I establish the following new bearing tree:

A ponderosa pine 15" in diam bears S69°E 75.5 feet, marked 1/4 SBT.

T 2 S R 36 E E - 03



DESCRIPTION OF CORNER EVIDENCE FOUND :

Found 2 1/2" iron pipe with brass cap marked as shown, 24 ins. above ground, in a mound of stone 3 ft. diam., from which:

A 25" Ponderosa Pine bears North 33° East, a distance of 93.84 feet, with scribes "1/4 SBT" visible on an open blaze. Distance measured to face of open blaze.

A 20" Ponderosa Pine bears South 76° East, a distance of 76.88 feet, with scribe marks visible on partially healed blaze.

See Survey Number 016-2011.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER: NEW BEARING OBJECTS:

A 7 inch Ponderosa Pine bears South 17° West, a distance of 122.00 feet, marked 1/4 S7 BT.



A 17 inch Ponderosa Pine bears North 51° West, a distance of 69.50 feet, marked 1/4 S6 BT.

I hereby certify that the corner was perpetuated on May 20, 2011.

Witness: Gregory T. Blackman Jr.



Renewal Date: June 30, 2011

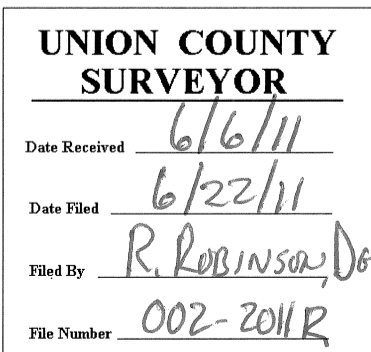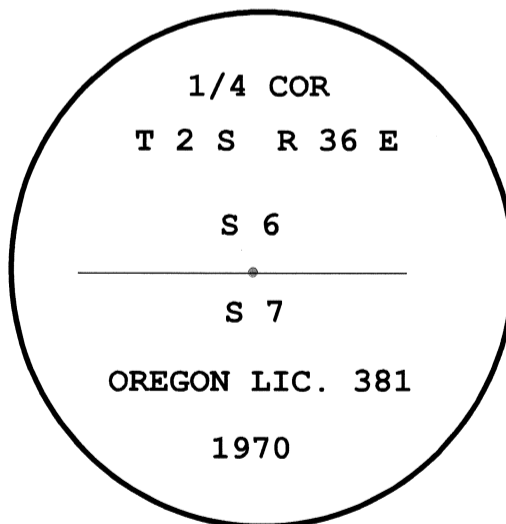

I used a magnetic compass and steel tape in the establishment of the accessories. Magnetic declination used was 16° East. For the new accessories, the distances are to a 60d spike in the right hand side of the trees and bearings are to a brass washer marked OPLS 83571 in the upper portion of the BT blaze. The distance to the Voelz accessory is to a spike in the left hand side of the blaze, unless otherwise noted.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201102

1/4 SECTION CORNER COMMON TO SECTIONS 6 and 7

TWP. 2 S. RGE. 36 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: MAY 20, 2011

LAT: 45 ° 24 ' 51.15666 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 21 ' 22.77364 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 644410.400 INT FT.

E: 8752505.981 INT FT.

TYPE: GPS

THETA: 1 ° 31 ' 12.9490219 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999037429

ELEV: 4282.33 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner is 2 1/2" iron pipe pipe with
brass cap marked as shown

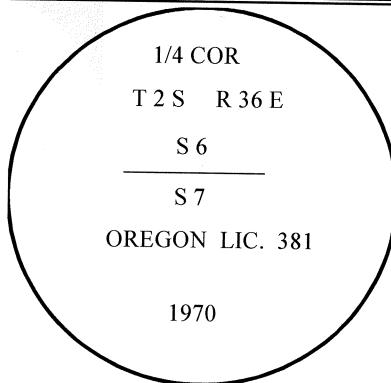

REGISTERED
PROFESSIONAL
LAND SURVEYOR

R. G. Robinson
OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2012

1 METER = 3.280833333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)