


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not set in original survey.

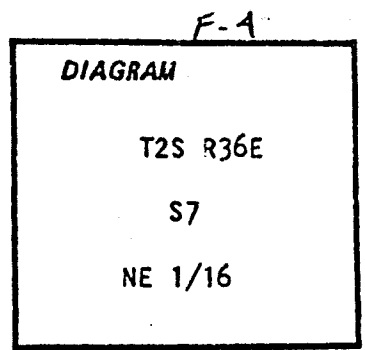

No record of subsequent monumentation found in County records.
Description of corner evidence found:

NONE

See map of survey dated 5/19/80


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2½ inch x 30 inch iron pipe with brass cap marked as shown, 28 inches in the ground,
From which;

A 12 inch tamarack bears N71W 31.2 feet marked NE 1/16 S7 BT

A 15 inch fir bears S1W, 27.0 feet marked NE 1/16 S7 BT

Raised mound of stone.

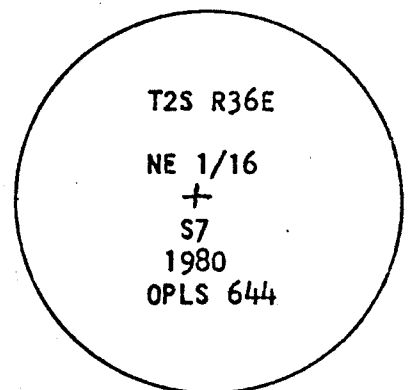

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
JULY 10, 1894

DUANE I. GRIFFITH

744

Brass washer nailed to B.T. blaze
Used steel tape and magnetic compass
with 20° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

**UNION COUNTY,
SURVEYOR**

Date Received _____

☆ GPO-700-276

Date Filed _____

By _____

File No. 234-84R