


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
None

No record of subsequent monumentation found in
Union County survey records

DESCRIPTION OF CORNER EVIDENCE FOUND:
None

See Union County Survey Number 043-1995.

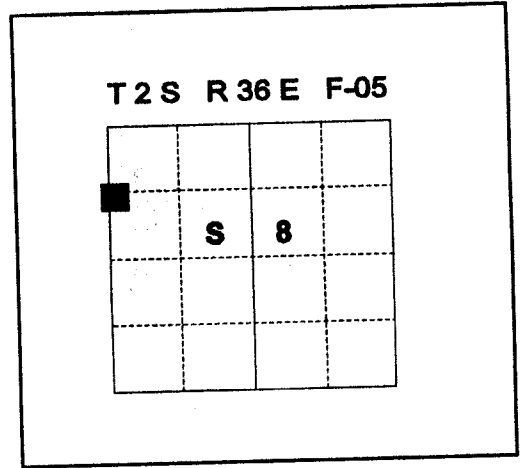

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by the survey I set a 2½"x30" aluminum pipe with
aluminum cap marked as shown, 24 inches in the ground, from which;

NEW BEARING TREES:

- A 12" Tamarack bears S35°E, 5.07 feet, marked N 1/16 S8 BT.
- A 11" Tamarack bears N73°W, 26.65 feet, marked N 1/16 S7 BT.


I hereby certify that the corner was monumented on October 26, 1995.
Witness: Mark Durbin, Jeff Madsen

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen

OREGON
JULY 20, 1983
JEFFERY P. PETERSEN
2625

Renewal Date: December, 31 1996

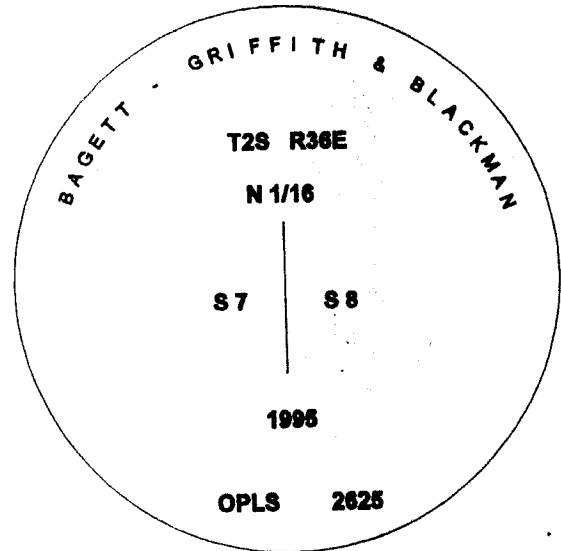

I used a steel tape and magnetic compass in
the establishment of the new accessories. I
used 18° East declination, the distances are
to a 60d spike driven into the right side of
the root crown of the bearing tree.

**UNION COUNTY
SURVEYOR**

Date Received 11-13-95

Date Filed 11-13-95

Filed By *Henry T. Black*

File Number 039-1995 R