


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

G-3

History of original corner establishment:
Corner not set in original survey.

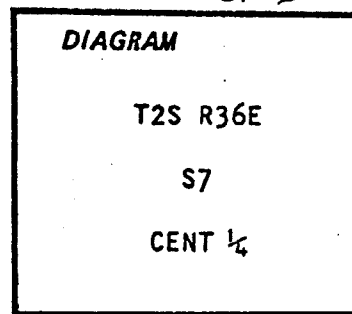

No record of subsequent monumentation found in County records.
Description of corner evidence found:

NONE

See map of survey dated 5/19/80


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2 1/2 inch x 30 inch iron pipe with brass cap marked as shown, 28 inches in the ground, From which;

A 12 inch tamarack bears S51W, 33.7 feet marked C 1/4 S7 Bt

A 14 inch fir bears N43W, 17.1 feet marked C 1/4 S7 BT

Raised mound of stone

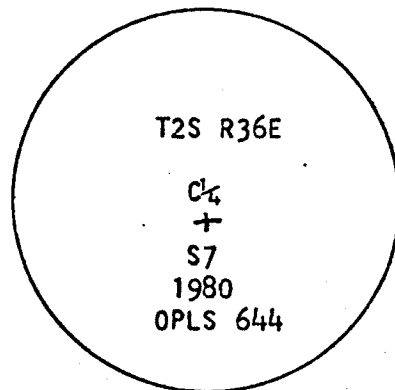

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
634

Brass washer nailed to B.T. blaze
Used steel tape and magnetic compass
with 20° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____
* CPO-708-278

Date Filed _____

By _____

File No. 237-84 R