


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

G-4

History of original corner establishment:
Corner not set in original survey.

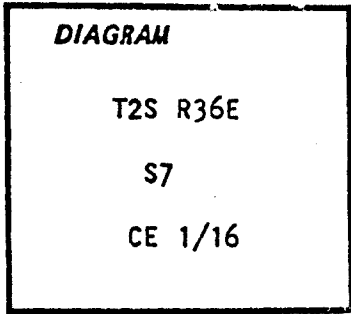

No record of subsequent monumentation found in County records.
Description of corner evidence found:

NONE


See map of survey dated 5/19/80

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2½ inch x 30 inch iron pipe with brass cap marked as shown, 28 inches in the ground,
From which;

A 13 inch tamarack bears S68E, 19.9 feet marked CE 1/16 S7 BT

A 14 inch fir bears N7W, 11.5 feet marked CE 1/16 S7 BT

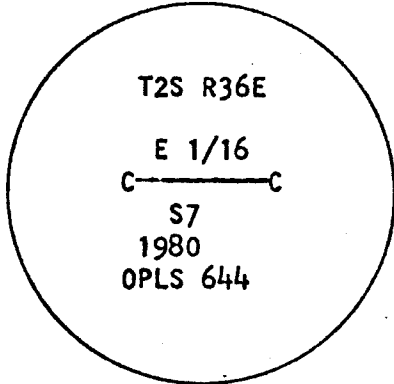

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

Brass washer nailed to B.T. blaze
Used steel tape and magnetic compass
with 20° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Received _____

☆ GPO—700-276

Filed _____

By _____

File No. 238-84R