


Index File No. G 13 CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. _____ Cor. No. _____
T 2S R. 36E R.D. _____ County _____
Merid. _____ N.F. _____ State _____

CORNER DIAGRAM

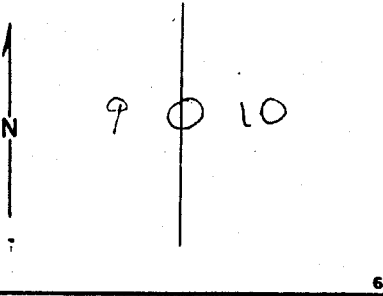

DESCRIBE CORNER MONUMENT FOUND

The $\frac{1}{4}$ cor to sections 9 & 10 monumented with a basalt stone 14" x 10" x 6" firmly set 6" in the ground marked $\frac{1}{4}$ on W face and X on the top from which the remains of the original bearing trees

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A pine 18" dia. bears S. 18° E. 75 lks with scribe mark T visible in open blaze
A sawed and decayed pine stump 24" dia. bears S. 74° W. 114 lks with scribe BT visible in decayed blaze

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature _____ Title _____ Division _____ Headquarters _____ Date _____ 7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

At the corner point Set an iron post 28" long 2 1/2" dia. 24" in the ground with brass cap marked

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

From which a new bearing tree
A pine 19" dia. bears N. 47 1/2° W. 92 lks. marked $\frac{1}{4}$ SØ BT
Deposit corner stone along side iron post

Work Done By Garrison Title C. Surveyor Date 7/75 State Registration No. _____ or Agency _____
Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No. _____ T. _____ R. _____ M. _____ Tract or Surv. No. _____ Cor. _____

UNION COUNTY SURVEYOR
Date Received _____
Date Filed 12-16-87
By G. LANGLITZ, DEPUTY
File No. 179-87R

G-13

Remonumentation of Certain Original Corner Points,
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E
S 16 | S 15
1975

from which new bearing trees

A fir, 18 ins. diam., bears N. 83½° E., 11 lks. dist., mkd. ½ S15 BT.

A fir, 15 ins. diam., bears S. 26° W., 12 lks. dist., mkd. ½ S16 BT.

The cor. of secs. 9, 10, 15, and 16, monumented with a basalt stone, 17 x 10 x 6 ins. (record, 15 x 10 x 6 ins., unmarked), loosely set 3 ins. in a mound of stone, mkd. with 5 grooves on E. face, from which the remains of the original bearing trees:

A pine, 30 ins. diam., bears N. 53° E., 90 lks. dist., with scribe marks 2S 36E S10 visible on open blaze. (Record, N. 50° E.)

A sawed and decayed pine stump, 27 ins. diam., bears S. 32° E., 105 lks. dist., no marks visible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top with brass cap mkd.

T 2 S R 36 E
S 9 | S 10
S 16 | S 15
1975

from which new bearing trees

A pine, 25 ins. diam., bears S. 64½° E., 89 lks. dist., mkd. T2S R36E S15 BT.

A pine, 7 ins. diam., bears S. 60¾° W., 79 lks. dist., mkd. T2S R36E S16 BT.

A pine, 25 ins. diam., bears N. 75½° W., 150 lks. dist., mkd. T2S R36E S9 BT.

Deposit corner stone alongside iron post.

The ¼ sec. cor. of secs. 9 and 10, monumented with a basalt stone, 14 x 10 x 6 ins., firmly set 6 ins. in the ground, mkd. ¼ on W. face and X on top, from which the remains of the original bearing trees:

A pine, 18 ins. diam., bears S. 18° E., 75 lks. dist., with scribe mark T visible on opened blaze.

A sawed and decayed pine stump, 24 ins. diam., bears S. 74° W., 114 lks. dist., with scribe marks BT visible on decayed blaze.

UNION COUNTY SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature]

File No. 335-2013R

Remonumentation of Certain Original Corner Points,
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 20 ins. in the ground, in a mound of stone, with brass cap mkd.

T 2 S R 36 E
¼
S 9 | S 10
1975

from which a new bearing tree

A pine, 19 ins. diam., bears N. 47½° W., 92 lks. dist., mkd. ¼ S9 BT.

Deposit corner stone alongside iron post.

The cor. of secs. 3, 4, 9, and 10, determined at record distance from the remains of the original bearing trees

A western larch, 17 ins. diam., bears N. 60° E., 30 lks. dist., with scribe mark S visible on partially healed blaze.

A western larch, 20 ins. diam., bears S. 71° E., 33 lks. dist., with healed blaze.

A western larch, 30 ins. diam., bears N. 30° W., 78 lks. dist., no marks visible on partially healed blaze. (Record, N. 32° W.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E
S 4 | S
S 9 | S 10
1975

from which a new bearing tree

A fir, 7 ins. diam., bears S. 54° W., 27 lks. dist., mkd. T2S R36E S9 BT.

The ¼ sec. cor. of secs. 3 and 10, monumented with the remains of a fir post, size indeterminate, from which the remains of the original bearing trees:

A root hole, bears S. 62° E., 40 lks. dist., with a down and decayed pine snag alongside, 12 ins. diam., no marks visible.

A decayed western larch snag, 12 ins. diam., bears N. 22° W., 13 lks. dist., with scribe marks BT visible on opened decayed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E
¼ S 3
S 10
1975

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 3352013R