


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not set in original survey.

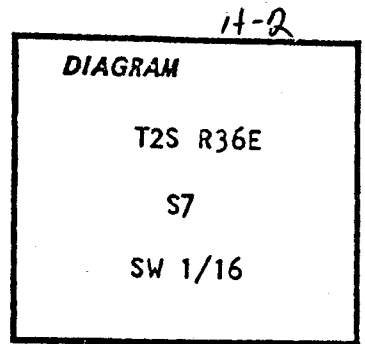

No record of subsequent monumentation found in County records.
Description of corner evidence found:

NONE


See map of survey dated 5/19/80

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2½ inch x 30 inch iron pipe with brass cap marked as shown, 28 inches in the ground,
From which;

A 6 inch lodge pole pine bears S81E, 15.5 feet marked X BT

A 6 inch lodge pole pine bears S23E, 14.1 feet marked SW 1/16 S7 BT

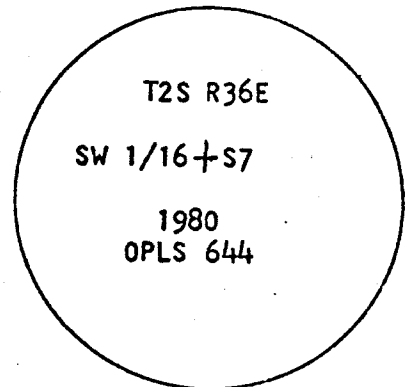

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Handwritten Signature

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to B.T. blaze
Used steel tape and magnetic compass
with 20° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY,
SURVEYOR**

Date Received _____

Date Filed ☆ GPO-796-276 _____

By _____

File No. 243-84 R