


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

H-3

History of original corner establishment:
Corner not set in original survey.

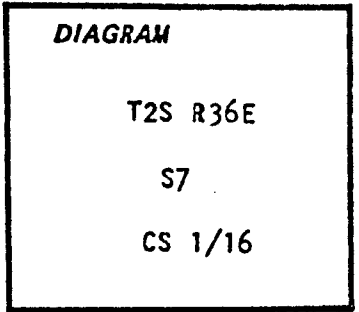

No record of subsequent monumentation found in County records.
Description of corner evidence found:

NONE


See map of survey dated 5/19/80

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2½ inch x 30 inch iron pipe with Brass cap marked as shown, from which;

A 6 inch lodge pole pine bears N45E, 33.0 feet marked CS1/16 S7 BT

A 16 inch tamarack bears S14E, 54.1 feet marked CS1/16 S7 BT

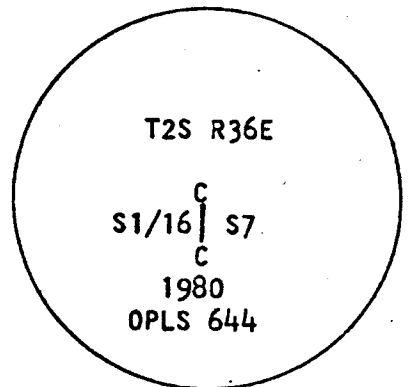

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

Brass washer nailed to B.T. blaze
Used steel tape and magnetic compass
with 20° East declination.
Measured to center of all B.T.s

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____

Date Filed ☆ GPO-794-2/6 _____

By _____

File No. 244-84 R