


Survey 7-70A

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original corner established by General Land Office contract Survey
The original notes state;
N89°E on true line between Secs 7 & 18;
39.76 chains set post from which;
A tamarack 13" diam bears S5°W 27 lks dist marked †SBT;
A tamarack 13" in diam bears N76°W 85 lks dist marked †SBT;

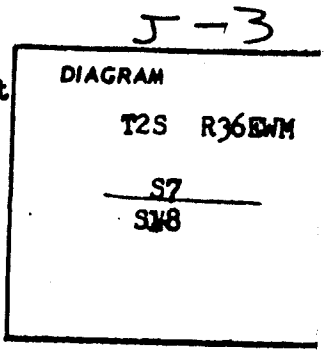

Description of corner evidence found:

In section 7 found a down log with scribe visible.
In section 18 found a down log with scribe visible.

Description of monument and accessories I established to perpetuate the original location of this corner

At the position of the corner I set a 30" galvanized pine with an. eight inch plate welded to bottom and bronze cap on top. The hole backfilled with stone and tamped soil.

I stamped the disk

†COR
T2S R36E
S7
S18
ORE LIC 381
1970

From the corner the original bearing trees are (none) I established the following new bearing trees;

A tamarack 9" in diam bears N52°E a dist of 25.3 ft. marked †SBT;

A lodge pole pine 9" in diam bears S30°W a distance of 4.5 ft. marked †SBT; The distance measured to center of respective trees on level.

I set a steel fence post near the corner with USFS sign 54-4 attached; I placed bearing tree signs on both old and new bearing trees and painted a stripe around the trees.

Office of County Surveyor County of Union

State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 21 day of July, 1970, at 2 o'clock P.m. (signature)

County Surveyor by J. W. [Signature] (DEPUTY)
(COUNTY OFFICIAL)

UNION COUNTY SURVEYOR
Date Received _____
Date Filed _____
By _____
File No. 249-84 R

Index File No. J-3

History of original corner establishment:
 In 1895, Marcus Buchanan, under GLO contract No. 635, set a Fir post 3" long, 3" square 24 inches in ground for 1/4 Sec. Cor. From which:

A Tamarack 13" dia. bears S5°W 27 lks. marked 1/4 S BT.
 A Tamarack 13" dia. bears N76°W 85 lks. marked 1/4 S BT.
 Remonumentation by J. Voelz, LS 381 in 1970

In section 7 found a down log with scribe visible.
 In section 18 found a down log with scribe visible.
 At the position of the corner I set a 30" galvanized pipe with an eight inch plate welded to bottom and bronze cap on top. the hole backfilled with stone and tamped soil. I stamped the disk From the corner the original bearing trees are (none). I established the following new bearing trees: A Tamarack 9" in diameter bears N52° E a dist. of 25.3 ft. marked 1/4 S BT;
 (cont'd on next page)

Description of corner evidence found:
 FOUND: 2" Iron Pipe set 24 inches in the ground, with brass cap stamped:

1/4 COR
 T2S R36E
 S7
 S18
 ORE LIC 381
 1970

From which:

OBT, a dead (down) 15" Tamarack bears S.70 W17.8 ft. with opened blaze and visible scribing 1/4 S BT"

OBT, a dead (down Tamarack bears N 76° 55.8 ft. with visible scribing "1/4 T" New Trees Set 1970 (Voelz)

A 10" dia. Tamarack bears N52°E 25.3 ft., scribing "1/4 S7 BT" visible.

A 10" Lodgepole Pine, dead, bears S30°W 4.5 ft., scribing "1/4 S18 BT" visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

We mark a new BT as follows:

A 12" dia. D. Fir bears S9°E 40.0 ft. scribed "1/4 S 18 Bt" on a double blaze.


Attached brass washer, marked "LS 1099" to lower BT blaze.

Attached signs and painted BT's per Standard Specifications for Cadastral Survey, USFS, Region 6, October, 1979.

Compass Declination; 18 1/2° East.

I hereby certify the above described corner monument and/or accessories was established as described on June 23, 1981.

Witnesses: Glen Wagoner
 Loren Huntsman

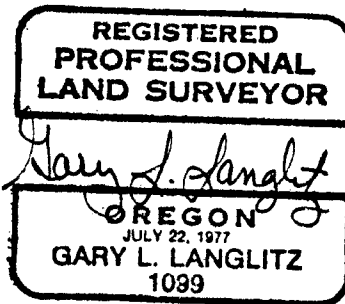

Office of..... Surveyor..... County of..... Union.....
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the 4 day of OCTOBER, 1982.
Howard L. Perry..... by Gary L. Langlitz.....
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR	
Date Received _____	★ GPO—798-276
Date Filed _____	
By _____	
File No. <u>250-84R</u>	

History of original corner establishment:

A Lodgepole Pine 9" in diam. bears S30°W a distance of 4.5 ft. marked 1/4 S BT;
The distance measured to center of respective trees on level.

Description of corner evidence found:

Description of monument and accessories established to perpetuate the original location of this corner:

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY
SURVEYOR**

Date Received _____
R 6 P O - 7 9 8 - 2 7 6

Date Filed _____

By _____

File No. 250-84 R