


BRASS CAPPED

Index File No. L 13  
T 2S R. 36E R.D. LaGrande County Union  
Merid. Will N.F. WW State Oregon Tract or Survey No. \_\_\_\_\_ Cor. No. W 4 5

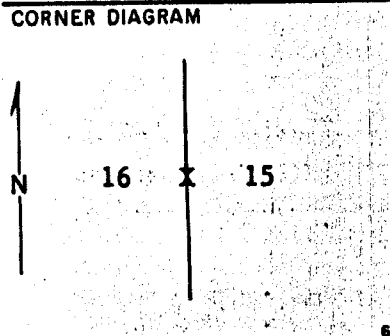

DESCRIBE CORNER MONUMENT FOUND  
None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND  
Sec. 16-12" DF stump bearing N74 W 16' dist. BT in poor cond. scribe visible.

PHOTO IDENTIFICATION DATA  
Photo No. ENW 4 198  
Filed At. \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By Approx. corner  
D Dahlstrom

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA  
State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_ Agency \_\_\_\_\_

Signature David Dahlstrom Title CET Division Whitman Headquarters La Grande Date 6/6/73 7100-52 REV. 65

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set an iron post 28" long 2 1/2" dia. 24" in ground with a brass cap marked

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Placed location Poster and BT Tag on Bearing Tree. Placed warning sign on 4" fir near BT.  
New bearing trees  
A fir 18" dia. bears N. 83 1/2° E. 11 lks. marked X S15 BT  
A fir 15" dia. bears S. 26° W. 12 lks. marked X S16 BT

Work Done By Garrison Title C. Surveyor Date 7/75 State Registration No. or Agency \_\_\_\_\_  
Certified Cor. Record Prepared? Yes  No  Filed At: \_\_\_\_\_ Date \_\_\_\_\_

REMARKS

Index File No. \_\_\_\_\_ T. \_\_\_\_\_ R. \_\_\_\_\_ M. \_\_\_\_\_ Tract or Surv. No. \_\_\_\_\_ Cor. \_\_\_\_\_

UNION COUNTY SURVEYOR  
Date Received \_\_\_\_\_  
Date Filed 12-16-87  
By G. LANGLITE, DEPUTY  
File No. 184-87R

7-13

Remonumentation of Certain Original Corner Points,  
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

A root hole, bears S. 66° W., 64 lks. dist.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E  
¼  
S 22 | S 23  
1975

from which new bearing trees

A pine, 12 ins. diam., bears N. 49° E., 37 lks. dist., mkd. ¼ S23 BT.

A pine, 17 ins. diam., bears S. 65½° W., 43 lks. dist., mkd. ½ S22 BT.

The cor. of secs. 27, 28, 33, and 34, monumented with the remains of a pine post, size indeterminate, from which the remains of the original bearing trees:

A sawed and decayed pine stump, 20 ins. diam., bears N. 48° E., 20 lks. dist., with scribe marks BT visible on decayed blaze.

A western larch, 26 ins. diam., bears S. 85° W., 29 lks. dist., with scribe marks 2S R36E S33 visible on partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E  
S 28 | S 27  
S 33 | S 34  
1975

from which new bearing trees

A pine, 8 ins. diam., bears N. 82° E., 15 lks. dist., mkd. T2S R36E S27 BT.

A pine, 10 ins. diam., bears S. 35° E., 21 lks. dist., mkd. T2S R36E S34 BT.

A pine, 12 ins. diam., bears N. 13½° W., 36½ lks. dist., mkd. T2S R36E S28 BT.

Deposit remains of corner post alongside iron post.

The ¼ sec. cor. of secs. 15 and 16, determined at record bearing and distance from the remains of the original bearing trees:

A decayed fir snag, 17 ins. diam., bears N. 74° W., 24 lks. dist., with scribe marks ¼ S BT visible on decayed double blaze.

At the corner point

**UNION COUNTY SURVEYOR**

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 341-2013R

Remonumentation of Certain Original Corner Points,  
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

Set an iron post, 28 ins. long,  $2\frac{1}{2}$  ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E  
 $\frac{1}{4}$   
S 16 | S 15  
1975

from which new bearing trees

A fir, 18 ins. diam., bears N.  $83\frac{1}{2}^{\circ}$  E., 11 lks. dist., mkd.  $\frac{1}{4}$  S15 BT.

A fir, 15 ins. diam., bears S.  $26^{\circ}$  W., 12 lks. dist., mkd.  $\frac{1}{4}$  S16 BT.

The cor. of secs. 9, 10, 15, and 16, monumented with a basalt stone, 17 x 10 x 6 ins. (record, 15 x 10 x 6 ins., unmarked), loosely set 3 ins. in a mound of stone, mkd. with 3 grooves on E. face, from which the remains of the original bearing trees:

A pine, 30 ins. diam., bears N.  $53^{\circ}$  E., 90 lks. dist., with scribe marks 2S 36E S10 visible on open blaze. (Record, N.  $50^{\circ}$  E.)

A sawed and decayed pine stump, 27 ins. diam., bears S.  $32^{\circ}$  E., 105 lks. dist., no marks visible.

At the corner point

Set an iron post, 28 ins. long,  $2\frac{1}{2}$  ins. diam., 16 ins. in the ground, to solid rock, and in a mound of stone, 4 ft. base, to top, with brass cap mkd.

T 2 S R 36 E  
S 9 | S 10  
S 16 | S 15  
1975

from which new bearing trees

A pine, 25 ins. diam., bears S.  $64\frac{1}{2}^{\circ}$  E., 89 lks. dist., mkd. T2S R36E S15 BT.

A pine, 7 ins. diam., bears E.  $60\frac{3}{4}^{\circ}$  W., 79 lks. dist., mkd. T2S R36E S16 BT.

A pine, 25 ins. diam., bears N.  $75\frac{1}{2}^{\circ}$  W., 150 lks. dist., mkd. T2S R36E S9 BT.

Deposit corner stone alongside iron post.

The  $\frac{1}{4}$  sec. cor. of secs. 9 and 10, monumented with a basalt stone, 14 x 10 x 6 ins., firmly set 4 ins. in the ground, mkd.  $\frac{1}{4}$  on W. face and X on top, from which the remains of the original bearing trees:

A pine, 18 ins. diam., bears S.  $18^{\circ}$  E., 75 lks. dist., with scribe mark T visible on opened blaze.

A sawed and decayed pine stump, 24 ins. diam., bears S.  $74^{\circ}$  W., 114 lks. dist., with scribe marks BT visible on decayed blaze.

UNION COUNTY  
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature] DEPUTY

File No. 341-20132