

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John A. Hurlburt under GLO contract number 201, dated August 5, 1873. Surveyor General record states:

Set pine post 4 ft. long 3 in. thick 2 ft. in ground for 1/4 sec. cor.

Pine 15 in. dia. S26°E 30 lks


Pine 20 in. dia. S66°W 64 lks

Corner remonumented by A. Joseph Garrison, under BLM group number 350, dated May 3, 1957. His record states: The 1/4 sec. cor. of secs. 22 and 23 determined at record bearing and distance from the remains of the original bearing trees:

A pine 30 ins. diam., bears N26°E, 30 lks. dist., with scribe marks 1/4 S visible on burned blaze. A root hole bears S66°W, 64 lks. dist.

At the corner point set an iron post 28 in long 2 1/2 in dia 24 ins. in the ground with brass cap marked (markings shown below) from which new bearing trees:


A pine, 12 ins. diam., bears N49°E, 37 lks. dist., mkd. 1/4 S23 BT.
A pine, 17 ins. diam., bears S65 1/4°W, 43 lks. dist., mkd. 1/4 S22 BT.

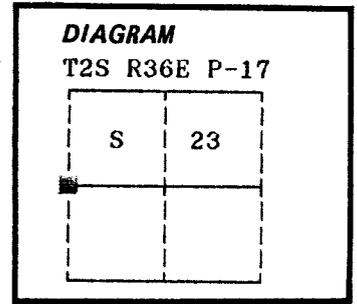

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found standard BLM brass cap monument marked as shown:



Original Bearing Trees:

Found a 32 inch diameter Ponderosa Pine N26°E,

30 lks, with blaze evident.

A root hole bears S66°W, 64 lks. dist.

BLM Bearing Trees:

Found a 15 inch diameter Ponderosa Pine N49°E, 37 lks, with blaze evident.

Found a 19 inch diameter Ponderosa Pine S65 1/4°W, 43 lks, with blaze evident.

Found steel fencepost approximately 5 feet South with Attention sign attached.

See map of survey dated June, 1989.

Description of monument and accessories I established to perpetuate the original location of this corner:

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

I hereby certify that the above corner point was perpetuated as hereon described on May 1, 1989.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith
OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

**UNION COUNTY
SURVEYOR**

Date Received 8-22-89
Date Filed 8-22-89
By G. LANGLITZ DEPUTY
File No. 129-89 R

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by

(COUNTY OFFICIAL)

(DEPUTY)

Remonumentation of Certain Original Corner Points,
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

A burned and decayed pine stump, size indeterminate,
bears S. 53° W., 177 lks. dist., no marks visible.

A burned pine snag, 20 ins. diam., bears N. 10° W.,
125 lks. dist., with scribe marks BT visible on
burned double blaze. (Record, N. 8° W.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 15 ins.
in the ground, in a mound of stone, 3½ ft. base, to top,
with brass cap mkd.

T 2 S R 36 E
S 27 | S 26
S 34 | S 35
1975

from which new bearing trees

A pine, 20 ins. diam., bears N. 32½° E., 112 lks.
dist., mkd. T2S R36E S26 BT.

A pine, 32 ins. diam., bears S. 66¾° E., 73 lks.
dist., mkd. T2S R36E S35 BT.

A pine, 14 ins. diam., bears S. 49½° W., 179 lks.
dist., mkd. T2S R36E S34 BT.

A pine, 20 ins. diam., bears N. 68½° W., 213 lks.
dist., mkd. T2S R36E S27 BT.

Deposit corner stone alongside iron post.

The ¼ sec. cor. of secs. 26 and 27, determined at record
bearing and distance from the remains of the original
bearing trees:

A root hole, bears N. 54° E., 67 lks. dist.

A pine, 30 ins. diam., bears N. 23° W., 48 lks.
dist., with scribe marks ¼ S visible on burned
and partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins.
in the ground, with brass cap mkd.

T 2 S R 36 E
¼
S 27 | S 26
1975

from which a new bearing tree

A pine, 20 ins. diam., bears N. 36½° E., 70 lks.
dist., mkd. ¼ S26 BT.

The ¼ sec. cor. of secs. 22 and 23, determined at record
bearing and distance from the remains of the original
bearing trees:

A pine, 30 ins. diam., bears S. 26° E., 30 lks.
dist., with scribe marks ¼ S visible on burned
blaze.

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature]

File No. 346-2013R

Remonumentation of Certain Original Corner Points,
T. 2 S., R. 36 E., Willamette Meridian, Oregon

CHAINS

A root hole, bears S. 66° W., 64 lks. dist.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E
S 22 | S 23
1975

from which new bearing trees

A pine, 12 ins. diam., bears N. 49° E., 37 lks. dist., mkd. ¼ S23 BT.

A pine, 17 ins. diam., bears S. 65½° W., 43 lks. dist., mkd. ¼ S22 BT.

The cor. of secs. 27, 28, 33, and 34, monumented with the remains of a pine post, size indeterminate, from which the remains of the original bearing trees:

A sawed and decayed pine stump, 20 ins. diam., bears N. 48° E., 20 lks. dist., with scribe marks BT visible on decayed blaze.

A western larch, 26 ins. diam., bears S. 85° W., 29 lks. dist., with scribe marks 2S R36E S33 visible on partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

T 2 S R 36 E
S 28 | S 27
S 33 | S 34
1975

from which new bearing trees

A pine, 8 ins. diam., bears N. 82° E., 15 lks. dist., mkd. T2S R36E S27 BT.

A pine, 10 ins. diam., bears S. 35° E., 21 lks. dist., mkd. T2S R36E S34 BT.

A pine, 12 ins. diam., bears N. 10½° W., 36½ lks. dist., mkd. T2S R36E S28 BT.

Deposit remains of corner post alongside iron post.

The ¼ sec. cor. of secs. 15 and 16, determined at record bearing and distance from the remains of the original bearing trees:

A decayed fir snag, 17 ins. diam., bears N. 74° W., 24 lks. dist., with scribe marks ¼ S BT visible on decayed double blaze.

At the corner point

UNION COUNTY
SURVEYOR

Date Received 3/15/13

Date Filed 3/15/13

By [Signature]

File No. 346-2013R