


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John A. Hurlburt under GLO contract number 201, dated August 5, 1873. Surveyor General record states:  
 Set pine post 4 ft. long 3 in. thick 2 ft. in ground for ¼ sec. cor.  
 Pine 24 in. dia. N45°W 18 lks  
 Pine 36 in. dia. S68°E 27 lks

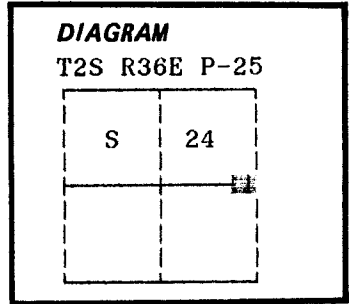

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found small mound of stone at the corner position.

Found the rotted remains of a Ponderosa Pine stump S68°E, 27 lks, no scribes visible.

Found the rotted remains of a Ponderosa Pine stump N45°W, 18 lks, with chop mark and blaze with possible scribes on piece of wood at base of stump.

Distances are to the estimated face of blaze.

See map of survey dated June, 1989.

UNION COUNTY SURVEYOR	
Date Received	<u>8-22-89</u>
Date Filed	<u>8-22-89</u>
By	<u>G. LANGRIZ, DEPUTY</u>
File No.	<u>135-89 R</u>

Description of monument and accessories established to perpetuate the

original location of this corner: At record bearing and distance from the found original bearing trees, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

New Bearing Trees:

- A 18 inch diameter Ponderosa Pine bears S28°W, 62.23 feet marked ¼ S24 BT
- A 10 inch diameter Ponderosa Pine bears N76°W, 25.03 feet marked X BT


Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet North with land survey monument sign attached.

Raised small mound of stone around monument.

I hereby certify that the above corner point was perpetuated as hereon described on May 19, 1989.

Witness: Rick Robinson

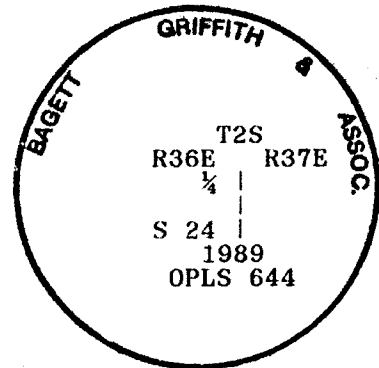

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Handwritten signature of Duane I. Griffith*

OREGON  
JULY 10, 1984  
**DUANE I. GRIFFITH**  
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)