

Index File No. R-5


**History of original corner establishment:**

In 1874, John A. Hurlburt, under GLO Contract No. 201 Set a basalt stone 18x12x10, 10 inches in the ground for Cor. to Sec. 19-20-29-30 from which:

- A 20" Pine bears N 62° W 40 lks.
- A 12" Fir bears N 38° E 21 lks.
- An 18" Pine bears S 84° E 81 lks.
- An 8" Pine bears S 3° W 21 lks.

The cor. of secs. 19, 20, 29, and 30, monumented with a basalt stone, 18x12x10 ins., firmly set 10 ins. in the ground, no marks visible, from which the remains of the original bearing trees:

- A decayed fir stump, 18 ins. diam., bears N.38° E., 21 lks. dist., no marks visible.
- A Pine, 18 ins. diam., bears S.84° E., 81 lks. dist., with scribe marks T2S 36E S29 visible on partially healed blaze. (Cont'd on next page)

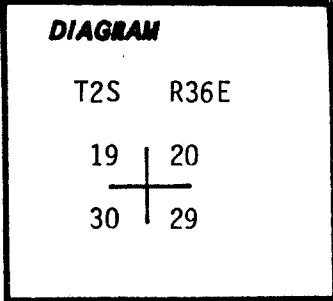

**Description of corner evidence found:**

FOUND: 2 1/2" Iron Pipe with brass cap set 12" in ground and mound of stone and dirt to cap stamped:

Bureau of Land Management  
T2S R36E  
S19 S20  
S30 S29  
1975

- From which:
- A Ponderosa Pine 21" bears S3° W. 14.0 ft.,
  - A down pine bears N. 62° W 40 lks. No visible scribing.
  - A Fir stump bears N 38° E 13.9 ft. No visible scribing.
  - A Ponderosa Pine, dead, bears S 84°E 55.5 ft. with visible scribing "29".

**BLM BT's (1975)**

- A Ponderosa Pine 9" in dia. bears N 48°E 12.5 ft.
- A Ponderosa Pine 8" in dia. bears N 46°W 29.0 ft.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

We mark a new BT as follows:

An 8" Douglas Fir which bears S 76°E 18.2 ft. scribed "T2S R36E S29 BT"


Attached brass washer stamped PLS 1099 in foot blaze. Attached all signs and painted BT's per Standard Specification for Cadastral Survey.

USFS Region 6, 1979.

Compass Declination: 18 1/2° East

I hereby certify the above described corner monument and/or accessories was established on June 26, 1981.

Witnesses: Loren Huntsman  
Millard Wyatt

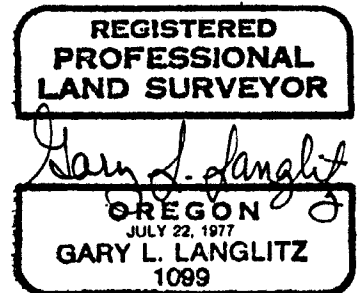

Office of.....Surveyor..... County of.....Union.....  
State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the...A... day of...OCTOBER....., 1981.  
.....Howard L. Perry..... by *Gary L. Langlitz*.....  
(COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY  
SURVEYOR**

Date Received \_\_\_\_\_  
Date Filed \_\_\_\_\_  
By \_\_\_\_\_  
File No. 298-84 R

History of original corner establishment:

A Pine, 25 ins. diam. bears S. 3° W., 21 lks. dist., with illegible scribe marks visible on partially healed blaze.

A root hole, bears N. 62° W., 40 lks. dist., with a down and decayed pine snag alongside, 24 ins. diam., no marks visible.

At the corner point set an iron post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a mound of stone, with brass cap mkd.

T 2 S R 36 E  
S 19 | S 20  
S 30 | S 29  
1975

from which new bearing trees

A Pine, 10 ins. diam., bears N.48° E., 19 lks. dist., mkd. T2S R36E S20 BT.

A Pine, 10 ins. diam., bears N. 46 1/4° W., 44 lks. dist., mkd. T2S R36E S19 BT.

Deposit corner stone alongside iron post.

Description of corner evidence found:

Description of monument and accessories established to perpetuate the original location of this corner:

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

by

(DEPUTY)

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
By	_____
File No.	<u>298-84 R</u>

T2S 36R05

Remonumentation of Certain Original Corner Points,  
T. 2 S., R. 36 E., Willamette Meridian, Oregon

The cor. of secs. 19, 20, 29, and 30, monumented with a basalt stone, 18 x 12 x 10 ins., firmly set 10 ins. in the ground, no marks visible, from which the remains of the original bearing trees:

A decayed fir stump, 18 ins. diam., bears N. 38° E., 21 lks. dist., no marks visible.

A pine, 18 ins. diam., bears S. 84° E., 81 lks. dist., with scribe marks T2S 36E S29 visible on partially healed blaze.

A pine, 25 ins. diam., bears S. 3° W., 21 lks. dist., with illegible scribe marks visible on partially healed blaze.

A root hole, bears N. 62° W., 40 lks. dist., with a down and decayed pine snag alongside, 24 ins. diam., no marks visible.

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 22 ins. in the ground, in a mound of stone, with brass cap mkd.

T 2 S R 36 E  
S 19 | S 20  
S 30 | S 29  
1975

from which new bearing trees

A pine, 10 ins. diam., bears N. 48° E., 19 lks. dist., mkd. T2S R36E S20 BT.

A pine, 10 ins. diam., bears N. 46½° W., 44 lks. dist., mkd. T2S R36E S19 BT.

Deposit corner stone alongside iron post.

T2S 36 R05

The ¼ sec. cor. of secs. 19 and 20, monumented with a basalt stone, 15 x 14 x 12 ins., firmly set 10 ins. in a mound of stone, 3 ft. base, 1½ ft. high, no marks visible, from which the remains of the original bearing trees:

A pine, 16 ins. diam., bears N. 63½° E., 42 lks. dist., with scribe marks BT visible on opened blaze. (Record, N. 60° E.)

At the corner point

Set an iron post, 28 ins. long, 2½ ins. diam., 14 ins. in the ground, in a mound of stone, 3½ ft. base, to top, with brass cap mkd.

T 2 S R 36 E  
S 19 | S 20  
1975

from which a new bearing tree

A pine, 18 ins. diam., bears N. 12½° W., 70 lks. dist., mkd. ¼ S19 BT.

Deposit corner stone alongside iron post.

T2S 36 P05

<b>UNION COUNTY SURVEYOR</b>	
Date Received	<u>3/15/13</u>
Date Filed	<u>3/15/13</u>
By	<u>[Signature] DEPUTY</u>
File No.	<u>348-2013R</u>