


Index File No. R-19  
T 29 R. 36E  
Merid. Will.

CORNER RECORD (SEARCH)

Tract or Survey No. \_\_\_\_\_  
Cor. S 1/4 29R  
No. 500 23  
R.D. La Grande County Union  
N.F. W-W State Oregon

CORNER DIAGRAM

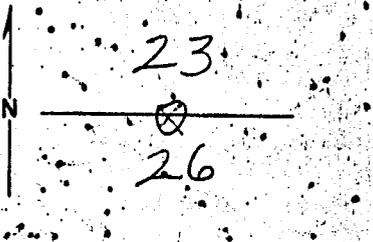

DESCRIBE CORNER MONUMENT FOUND.

Pile of stone, basalt. trace evidence.  
Found embedded 24" P. Pine, green.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND.

24" P Pine, Green, Scribes visible, Old tag on tree.  
Tree is now dead.  
12/23/80  
52

PHOTO IDENTIFICATION DATA

Photo No. ENW A-217  
Filed At. \_\_\_\_\_  
Object Ident. \_\_\_\_\_  
Ident. By \_\_\_\_\_  
Signature \_\_\_\_\_

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Sub on, break of rim flat top large boulders, look down onto railroad grade. Open pine stand, 100 yds from old private road. See photos South exposure.

PLANE COORDINATE POSITION DATA

State \_\_\_\_\_ Zone \_\_\_\_\_  
X \_\_\_\_\_  
Y \_\_\_\_\_  
Estab. By \_\_\_\_\_  
Agency \_\_\_\_\_

Signature Dewey Flowers Title Engr Division \_\_\_\_\_ Headquarters La Grande Date 5-73 7100-52 REV. 65 5

UNION COUNTY SURVEYOR  
Date Received \_\_\_\_\_  
Date Filed 12-16-87  
By G. LANGLITZ, DEPUTY  
File No. 189-87R

R-19


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John A. Hurlburt under GLO contract number 201, dated August 5, 1873. Surveyor General record states:

Set basalt stone 24x12x5 10 in. in ground and made stone mound 2 ft. high for ¼ sec. cor.

Pine 12 in. dia. bears S27°E 19 lks

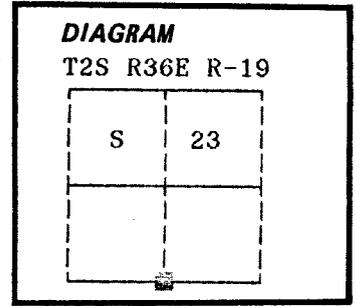

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a stone 24x12x5 inches marked ¼.  
Found stone in a mound of stone.

Found a 20 inch diameter Ponderosa Pine S27°E, 19 lks, dead and down with scribes visible.

See map of survey dated June, 1989.

UNION COUNTY SURVEYOR	
Date Received	<u>8-22-89</u>
Date Filed	<u>8-22-89</u>
By	<u>G. LANGLITZ, DEPUTY</u>
File No.	<u>140-89 R</u>

Description of monument and accessories | established to perpetuate the

original location of this corner: In place of the found original corner stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 10 inches in the ground, from which:


New Bearing objects:

- A 4 ft. high rock outcrop bears S39°W, 16.9 feet marked X B0 on West end.
- A 15'x10'x5' high rock outcrop bears N40°W, 17.6 feet marked X B0 on East end.

Buried the original corner stone North and alongside of monument.  
Raised mound of stone around monument, 4 ft. base to top of cap.

Set a steel fencepost approximately 5 feet East in rockjack with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on May 11, 1989.

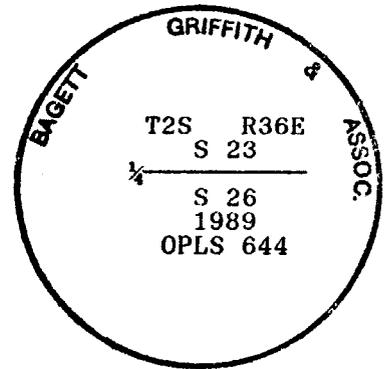

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to the chiseled "X" on the bearing object.

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)