

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. T-13


History of original corner establishment:

In 1874, J. Hurlburt under GLO Contract No. 201

Set Pine Post 4 ft. long, 3 in. thick, 2 ft in ground for 1/4 Sec. Cor.

Pine 6 in. dia. bears S68° W 31 lks.

Pine 8 in. dia. bears N 75° 28 lks.

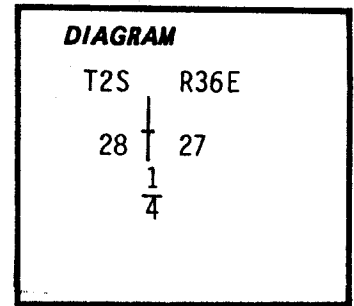

Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner:

Corner location determined by survey and single proportionage measurement along West boundary of Section 27.

At surveyed point set 2 1/2" x 30" galvanized pipe with brass cap attached 24 inches in the ground stamped:

T2S R36E
 1/4
 S28 | S27
 1981
 OR PLS 1099

From which:

An 11" Lodgepole Pine bears N85°E 65.9 ft. scribed 1/4 S 28 BT

A 6" diameter Fir bears S49°W 149.0 ft., scribed 1/4S28 BT Attached 54-3 and 54-4 signs to BT's. Painted blazes and 6" red ring around BT's. Attached brass washers LS 1099 to foot blazes, set metal post 5' north of corner with 54-4 signs.

Corner falls in large clear cut 210 ft. north of main Spring Creek road.

Compass Declination: 18 1/2° East

I hereby certify the above described corner monument and/or accessories was established as described on November 17, 1981.

Witnesses: Loren Huntsman
Millard Wyatt



Office of..... Surveyor..... County of..... Union.....
 Oregon
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the 17 day of OCTOBER, 1982
 Howard L. Perry..... by Gary L. Langlitz
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____
 * GPO—798-276

Date Filed _____

By _____

File No. 307-84 R