


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established by Henry Meldrum under GLO contract number 450, dated June 11, 1882. Surveyor General record states:

Set post 4 ft. long 4 in. square 24 in. in ground for Cor. to Secs. 9, 10, 15 & 16 marked T2S S10 on NE, R37E S9 on NW, S16 on SW and S15 on SE with 4 notches on S and 3 on E edges, from which:

- A Pine 9 in diam bears N70°E 28 lks dist marked T2S S10 BT
- A Tamarack 17 in diam bears S27°E 7 lks dist marked S15 BT
- A Fir 15 in diam bears S53°W 27 lks dist marked S16 BT
- A Pine 9 in diam bears N20°W 35 lks dist marked R37E S9 BT

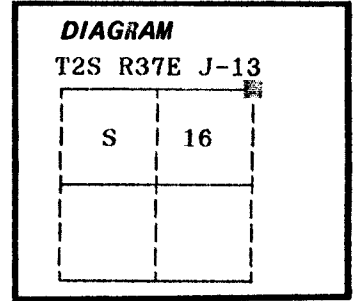

No record of subsequent monumentation found in Union County survey records.

**Description of corner evidence found:**

Found the rotted remains of the original corner post to a depth of 5 inches.

Found no evidence of the original Northeast bearing tree.

Found a tamarack stump rotted away to 10 inch diameter S27°E, 7 lks, with no marks visible.

Found a 37 inch diameter White Fir S53°W, 27 lks, live but sickly, chopped open with portion of the original blaze evident.

Found a root hole N20°W, 35 lks, with remains of Lodgepole pine, no marks visible.

See map of survey dated November, 1989.

**Description of monument and accessories established to perpetuate the**

original location of this corner: In place of the found original corner post, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

**New Bearing Trees:**


- A 10 inch diameter Western Larch bears N10°E, 37.16 feet marked T2S R37E S10 BT
- A 10 inch diameter Western Larch bears S36°E, 57.75 feet marked T2S R37E S15 BT
- A 13 inch diameter Western Larch bears S4°W, 18.98 feet marked T2S R37E S16 BT
- A 13 inch diameter Western Larch bears N57°W, 40.8 feet marked T2S R37E S9 BT

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet East with land survey monument and property boundary signs attached.

I hereby certify that the above corner point was perpetuated as hereon described on October 6, 1989.

Witness: Rick Robinson

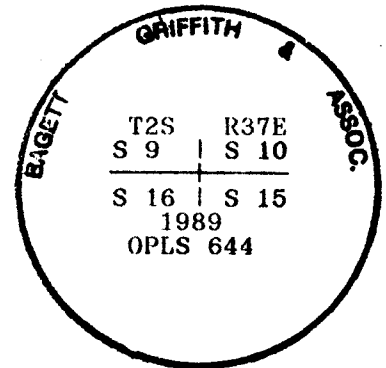

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

OREGON  
JULY 10, 1864  
**DUANE I. GRIFFITH  
644**

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of..... 19.....

**UNION COUNTY SURVEYOR**  
(COUNTY OFFICIAL) SURVEYOR (DEPUTY)

Form R6-7100-57 (9/71)

Date Received 12-27-89

Date Filed 12-27-89

R. ROBINSON, DEPUTY

File No. 268-89R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276