


History of original corner establishment:

Corner not previously established.

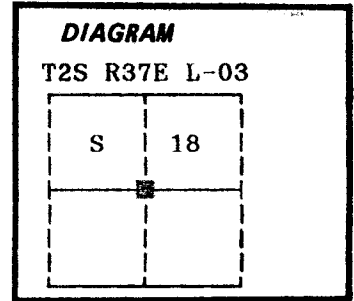

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Corner not previously established

See map of survey dated November, 1989.

Description of monument and accessories I established to perpetuate the

original location of this corner:

At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which:

New Bearing Trees:


- A 9 inch diameter Douglas Fir bears N2°E, 13.18 feet marked Y BT
 - A 10 inch diameter Ponderosa Pine bears S51°E, 23.88 feet marked F BT
 - A 13 inch diameter Douglas Fir bears S41°W, 21.75 feet marked C¼ S18 BT
 - A 11 inch diameter Ponderosa Pine bears N81°W, 12.67 feet marked C¼ S18 BT
- Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet North with land survey monument sign attached.

Raised a mound of stone around monument, 3 ft. base to top of cap.

I hereby certify that the above corner point was perpetuated as hereon described on October 26, 1989.

Witness: Greg Blackman

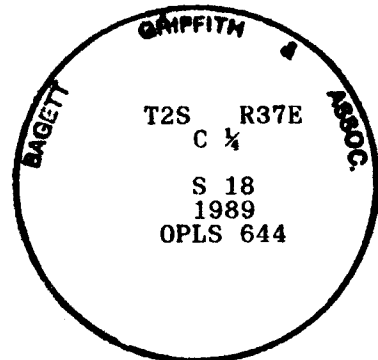

REGISTERED PROFESSIONAL LAND SURVEYOR

Duane I. Griffith
 OREGON
 JULY 10, 1984
 DUANE I. GRIFFITH
 644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of..... 19.....

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR

Date Received 12-17-89

Date Filed 12-27-89

By R. Robinson Deane

File No. 16-82R

Form R6-7100-57 (9/71)

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276