

UNION COUNTY SURVEYOR


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
NONE

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 030-2002

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

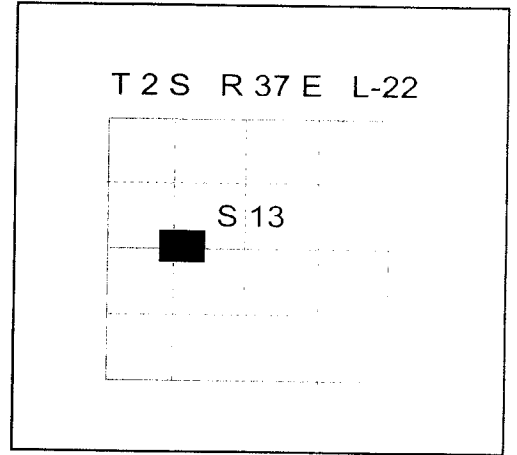

At the position of the 1/16 corner established by Survey Number 030-2002, I set a 5/8" x 30" iron pin with a 2 1/2" aluminum cap marked as shown below, 30" in the ground, from which;

NEW BEARING TREES:

A 11" diameter Lodgepole Pine bears North 65° East, a distance of 43.76 feet marked X BT.

A 11" diameter Lodgepole Pine bears South 72° East, a distance of 19.58 feet, marked CW1/16 S13 BT.


I set a fence post 1 ft. North of the monument. An existing fence cornering North and West is 23.4 ft. North and 7.5 ft. West of the monument.

I hereby certify that the corner was monumented on August 8, 2002.
Witness: Norbert W. Volny and Gregory T. Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

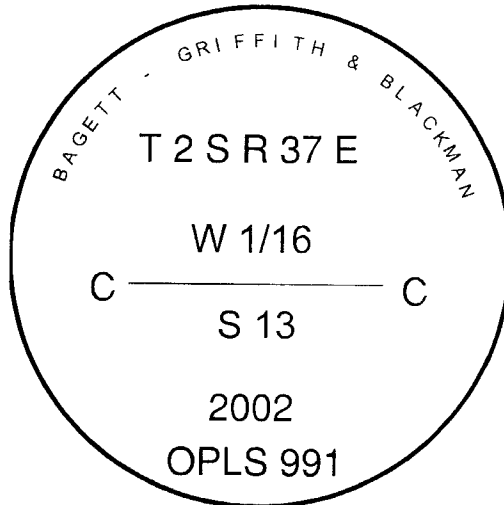

**UNION COUNTY
SURVEYOR**

Date Received 8/16/02

Date Filed 9/18/02

Filed By P. Robinson Deputy

File Number 032-2002R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 991 to the BT blaze.