

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

NONE


DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey Number 030-2002

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position of the 1/16 corner established by Survey Number 030-2002, I set a 5/8" x 30" iron pin with a 2 1/2" aluminum cap marked as shown below, 25" in the ground with a mound of stone 1 ft. from base to top of cap, from which;

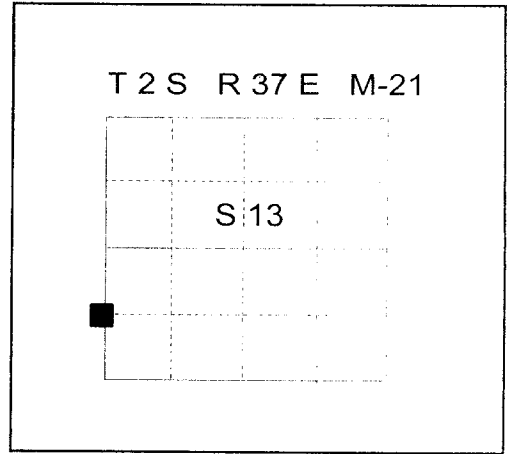

NEW BEARING TREES:

A 9" diameter Ponderosa Pine bears North 7° West, a distance of 72.70 feet marked X BT.

A 16" diameter Ponderosa Pine bears South 68° West, a distance of 45.70 feet, marked S1/16 S14 BT.


I set a steel fence post 1 ft. North of the monument. An existing fence cornering East, North, and West is 7.7 ft. South and 4.1 ft. East of the monument.

I hereby certify that the corner was monumented on August 14, 2002. Witness: Norbert W. Volny and Gregory T. Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: December 31, 2003

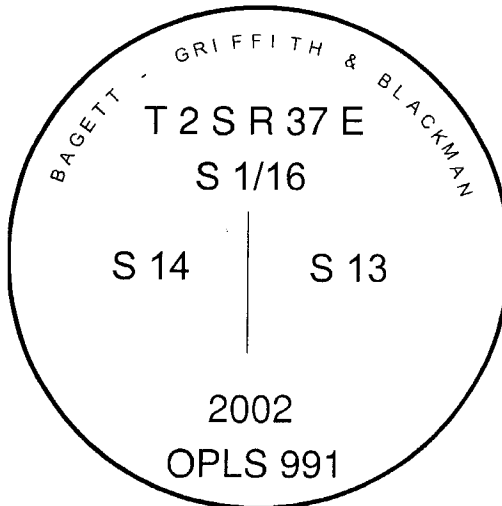

UNION COUNTY SURVEYOR

Date Received 8/16/02

Date Filed 9/18/02

Filed By R. Robinson, Deputy

File Number 036-2002R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing tree. I attached a brass washer marked OPLS 991 to the BT blaze.