


History of original corner establishment:

Corner originally established by Henry Meldrum under GLO contract number 450, dated June 11, 1882. Surveyor General record states:

Set basalt stone 24x18x10 ins. 18 in. in ground for 1/4 Sec. Cor. marked 1/4 on W face, from which;

A Tamarack 5 in diam bears N67°E 63 lks dist marked 1/4S BT
A Fir 7 in diam bears S61°W 31 lks dist marked 1/4S BT

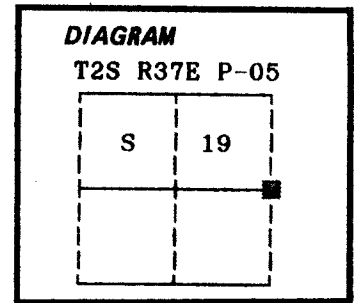

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found a stone 20x13x10 inches, firmly set 14 inches in the ground, marked 1/4 on the West face.

Found a Western Larch stump hole N67°E, 63 lks, with a down 8 inch diameter Western Larch 20 feet Northerly with scribes visible.

Found a 20 inch diameter Douglas Fir S61°W, 31 lks, live and leaning Northeasterly with blaze evident.

See map of survey dated November, 1989.

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of the found original corner stone, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 29 inches in the ground, from which:

New Bearing Trees:

A 10 inch diameter Douglas Fir bears S73°E, 31.70 feet marked 1/4 S20 BT
A 20 inch diameter Ponderosa Pine bears S62°W, 24.24 feet marked 1/4 S19 BT


Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet South with land survey monument and property boundary signs attached.

Buried the original corner stone North and alongside of monument.

I hereby certify that the above corner point was perpetuated as hereon described on October 2, 1989.

Witnesses: Rick Robinson and Jeff Petersen.

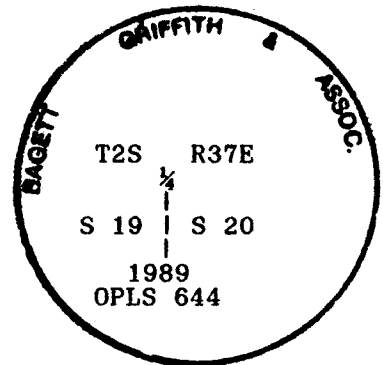

REGISTERED PROFESSIONAL LAND SURVEYOR

OREGON JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 17° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day UNION COUNTY SURVEYOR, 19.....

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

Received 12-27-89
 12-27-89
 by R. ROBINSON DEPUTY
 File No. 218-89R

☆ U.S. GOVERNMENT PRINTING OFFICE - 1983-793-276

P-05