


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

7-21

**History of original corner establishment:**

Set pine post 4' long, 3" thick, 2' in ground for  $\frac{1}{4}$  section corner, from which;

A pine, 30" diameter, bears S67°E 87 lks. distance  
 A pine, 6" diameter, bears S55°W, 47 lks. distance.



**Description of corner evidence found:**

Found stump with scribe at S55°W lks distance.


**Description of monument and accessories established to perpetuate the original location of this corner**

At the corner a 2" galvanized pipe with brass cap was set marked;

From which;

Douglas fir, 11" diam bears S86°E distance of 12.0' marked  $\frac{1}{4}$ SBT;

Douglas fir, 9" diam. bears N13°W distance of 11.7' marked  $\frac{1}{4}$ S BT.

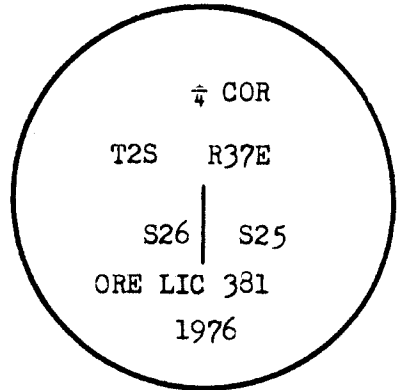

*Witness finding B.T.*  
*Medard R. Hammit*

REGISTERED  
 Office of Union County Surveyor..... County of Union  
 State of Ore., I hereby certify that the within instrument was filed in this office  
 for record on the 10th day of Dec. 1976  
 \_\_\_\_\_ by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)

REGISTERED  
 MAY 1976  
 JAMES C. DAVIS

**UNION COUNTY SURVEYOR**

Received \_\_\_\_\_

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 318-84 R