

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


(T2S R38E)

History of original corner establishment:

Corner established by T. Davenport under GLO contract no. 102 dated July 20, 1863.

Surveyor General records state:

Set post corner to Secs 4, 5, 32 & 33 made mound of rock near the post.



Description of corner evidence found:

Found a rock outcrop 6 ft x 4 ft x 4 ft with 3-inch X on east end for section corner established by proportionate measurement between the found Northwest corner of Section 5 and the found Northeast corner of Section 4 and marked by D. I. Griffith in June, 1978. This agrees with record of survey filed in Union County surveys under survey no. 73-78.

Two bearing trees were marked during this previous work and they are:

A pine 21 ins diam bears N 11° W, 95.0 ft dist marked T 1 S R 38 E S 32 BT with 1 inch of overgrowth.


A pine 27 ins diam bears S 79° W, 86.0 ft dist marked T 2 S R 38 E S 5 BT with 1 inch of overgrowth.

No trace of original post or rock mound.

Description of monument and accessories established to perpetuate the original location of this corner:

The North quarter-section corner to Section 5 was recovered during the course of this survey and therefore the proportionate relocated position of the existing monument is in error. At the proper proportionate position for this corner set a 2½ inch aluminum cap on a 2 inch aluminum pipe 30 inches long and projecting 5 inches out of the ground with a surrounding rock mound. Set a 6 foot steel fence post alongside with sign 54-4 attached.

Aluminum cap marked thus:



New bearing trees:

A pine 11 ins diam bears N 50° E, 118.1 ft dist marked T 1 S R 38 E S 33 BT

A pine 11 ins diam bears S 26° E, 82.3 ft dist marked T 2 S R 38 E S 4 BT

Bearing trees established by Griffith:

A pine 21 ins diam bears N 12° W, 102.8 ft dist marked T 1 S R 38 E S 32 BT

A pine 27 ins diam bears S 88° W, 97.0 ft dist marked T 2 S R 38 E S 5 BT

Each bearing tree has a sign 54-3 attached below a 6 inch band of red paint and has a sign 54-4 attached on opposite side of tree from BT blaze.

Each new bearing tree established by me also has a brass washer marked PLS 1639 nailed flush with BT blaze.

I hereby certify that the above described corner monument was properly established by me on Nov. 02, 1983, and witnessed by

Office of Co. Surveyor Union County of Union

State of Union I hereby certify that the within instrument was filed in this office for record on the day of 19

(COUNTY OFFICIAL)

REGISTERED PROFESSIONAL LAND SURVEYOR

William L. Hanley

OREGON JULY 14, 1978 WILLIAM L. HANLEY 1639

UNION COUNTY SURVEYOR Date Received 11-10-83 Date Filed 11-14-83 By G. LANGLITZ, DEPUTY File No. 396-83 R

Dependent Resurvey of the West Boundary,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

F E E T

A fir, 9 ins. diam., bears S. 44° W., 19.5 ft. dist., mkd.
T1S R37E S1 CC BT.

A lodgepole pine, 12 ins. diam., bears N. 14¼° W.,
33.4 ft. dist., mkd. X BT.

Deposit a magnet in a white plastic case at the base of the
stainless steel post.

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

(Restoring the survey by David P. Thompson in 1863
and Frank W. Campbell, in 1883)

From the cor. of secs. 4, 5, 32, and 33, on the S. bdy. of the
Tp., reestablished at proportionate measurement by
William L. Hanley, Registered Professional Land Surveyor
No. 1639, in 1983, recorded in the Union County survey records,
survey file No. 42-83. This position was verified and used
during an amended survey by Duane I. Griffith, Registered
Professional Land Surveyor No. 644, in 1990, recorded in the
Union County survey records, survey file No. 1-90 (this survey
amended his previous survey in 1978, recorded in the Union
county survey records, survey file No. 73-78). There is no
remaining evidence of the original cor.; therefore this position
is accepted as the cor., monumented with an aluminum post,
2 ins. diam., firmly set, projecting 5 ins. above a collar of
stone, with aluminum cap mkd.

T 1 S	R 38 E
S 32	S 33
S 5	S 4
T 2 S	
1983	
ORLS 1639	

from which bearing trees mkd. by Griffith in 1978

A pine, 28 ins. diam., bears S. 83° W., 97.0 ft. dist.,
with scribe marks T2S R38E S5 BT visible on partially
healed double blazes.

Z-9

UNION COUNTY SURVEYOR	
Date Received	<u>6/12/11</u>
Date Filed	<u>6/23/11</u>
By	<u>R. ROBINSON, DEPUTY</u>
File No.	<u>023-2011R</u>

Dependent Resurvey of a Portion of the Subdivisional Lines,
T. 1 S., R. 38 E., Willamette Meridian, Oregon

<p>FEEET</p> <p>105</p>	<p>A pine, 23 ins. diam., bears N. 18½° W., 103.2 ft. dist., with healed double blazes.</p> <p>and bearing trees mkd. by Hanley</p> <p>A pistol butt pine, 13 ins. diam., bears N. 43¾° E., 117.6 ft. dist., with scribe marks T1S R38E S33 visible on partially healed upper blaze and a healed lower blaze..</p> <p>A pine, 14 ins. diam., bears S. 30¾° E., 82.0 ft. dist., with healed double blazes.</p> <p>N. 0° 20' 05" E., bet. secs. 32 and 33.</p> <p>Ascend over SE. slope, through scattered pine.</p> <p>Spur, slopes E., continue over broken E. slope, through fir, tamarack, and pine timber with moderate to dense undergrowth.</p>
<p>2653.34</p>	<p>Point for the ¼ sec. cor. of secs. 32 and 33, at proportionate dist., there is no remaining evidence of the original cor.</p> <p>Cement an aluminum rod, 26 ins. long, ¼ in. diam., 14 ins. in the ground, the bottom 9 ins. in a drill hole, in a mound of stone, 3½ ft. base, to top, with aluminum cap mkd.</p> <p style="text-align: center;">T 1 S R 38 E 1/4 S 32 S 33 2003</p> <p>from which</p> <p>A pine, 13 ins. diam., bears N. 87¾° E., 94.4 ft. dist., mkd. 1/4 S33 BT.</p> <p>A double trunk pine, 16 ins. diam., bears S. 66¾° W., 36.0 ft. dist., mkd. 1/4 S32 BT.</p> <p>Deposit a magnet at the bottom of the drill hole.</p> <p>Continue over broken E. slope.</p>
<p>5130</p>	<p>Spur, slopes N. 80° E., desc. over NE. slope.</p>
<p>5306.68</p>	<p>Point for the cor. of secs. 28, 29, 32, and 33, at proportionate dist., there is no remaining evidence of the original cor.</p>

Z-9

UNION COUNTY SURVEYOR	
Date Received	<u>6/12/11</u>
Date Filed	<u>6/23/11</u>
By	<u>R. ROBINSON, DEPUTY</u>
File No.	<u>023-2011R</u>

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 201402

SECTION CORNER COMMON TO SECTIONS 32, 33, 4 AND 5

TWP. 1and2 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: January 26, 2014

LAT: 45 ° 25 ' 37.98572 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 4 ' 34.02377 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 651184.692 INT FT.

E: 8824289.199 INT FT.

TYPE: GPS

THETA: 1 ° 43 ' 8.34032783 "

ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9999047402


ELEV: 3888.42 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

Corner falls on Southerly facing slope

Monument is 6" above ground.

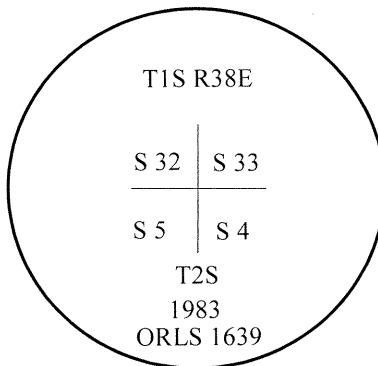

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
July 17, 1986
RICK G. ROBINSON
2219

Renewal Date: December 31, 2014

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)