


**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner was originally established by Timothy W. Davenport under GLO contract number 102, dated January 12, 1864. Surveyor General records states: Set qrt Sec post from which:  
An alder 5 in dia bears N35°W, 31 lks dist  
An alder 6 in dia bears N45°E, 1 lk dist.

T 2 S R 38 E A-11



**DESCRIPTION OF CORNER EVIDENCE FOUND:**

No evidence of the original corner monument or its' accessories were found. None were found and its' position proportioned on surveys 73-78, 42-83, 1-90, and 006-2002.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**


**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 26" in the ground from which:

- A 5/8" iron pin with 1/1/2" aluminum cap bears N36°E, a distance of 14.70 feet, marked BGB SURVEY MARKER NE RP.
- A 5/8" iron pin with 1/1/2" aluminum cap bears S74°E, a distance of 12.80 feet, marked BGB SURVEY MARKER SE RP.
- A 32" Douglas Fir bears S22°W, a distance of 22.15 feet, marked 1/4 S4 BT.
- A 5/8" iron pin with 1/1/2" aluminum cap bears N57°W, a distance of 10.35 feet, marked BGB SURVEY MARKER NW RP.

I hereby certify that the corner was monumented on February 2, 2007.  
Witness: Jeff Hsu, Leo Castillo

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR



OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date: December 31, 2008

BAGETT - GRIFFITH & BLACKMAN

T 1 S R 38 E

S 33

1/4 ————— S 4

T 2 S  
2007  
OPLS 2219

**UNION COUNTY SURVEYOR**

Date Received 2/15/07

Date Filed 2/15/07

Filed By Greg T. Black

File Number 005-2007R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 50d nail driven on the right side of the bearing tree, and to the center of the caps on the reference pins. I attached a brass washer marked OPLS 2219 to the top of the BT blaze on the bearing tree.

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200709

1/4 SECTION CORNER COMMON TO SECTIONS 33 and 4

TWP. 1 S. RGE. 38 E.  
& 2S

GEODETIC COORD: NAD 83(91)

DATE TIED: February 27, 2007

LAT: 45 ° 25 ' 38.17364 " N

SURVEYOR: RICK G. ROBINSON  
OPLS 2219

LONG: 118 ° 3 ' 57.13498 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN  
2006 Adams Avenue  
La Grande, OR 97850  
(541) 963-6092

SP. COOR: NAD 83(91)

N: 651282.796 INT FT.

E: 8826918.118 INT FT.

TYPE: GPS

THETA: 1 ° 43 ' 34.5013431 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999047443

ELEV: 3197.54 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

Corner is a 2 1/2"x30" aluminum pipe  
with 2 1/2" aluminum cap marked:

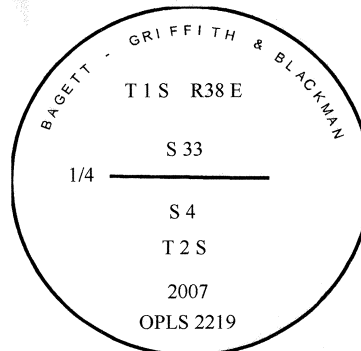

Renewal Date: December 31, 2008

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)