


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Herman D. Gradon under GLO contract no. 452 dated June 16, 1882.

Surveyor General records state:

Set a basalt stone 12 x 12 x 8 ins 8 ins in the ground for 1/4 sec cor marked 1/4 on N face and raised a mound of stone alongside.



Description of corner evidence found:

NONE: There are several very large diameter trees in the area of this corner, however, trees were scribed according to the official records of the Surveyor General. Also, area has been extensively disturbed by previous logging operations.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2 1/2 inch brass cap on a 2 inch galvanized iron pipe 31 inches long 27 inches in the ground with 4 inches projecting out of the ground with a surrounding rock mound and a 6 foot steel fence post alongside with a sign 54-4 attached.

Brass cap marked thus:

T 2 S R 38 E

$\frac{1}{4}$	$\frac{S}{S} \frac{6}{7}$
---------------	---------------------------

1983

ORLS 1639

New bearing trees:

A fir 13 ins diam bears N 81° E, 37.3 feet dist marked 1/4 S 6 BT.

A spruce 9 ins diam bears S 10° W, 41.3 feet dist marked 1/4 S 7 BT.

Each new bearing tree has a sign 54-3 nailed below a 6 inch band of red paint and a brass washer marked PLS 1639 nailed flush with BT blaze with a sign 54-4 nailed on opposite side of tree from BT blaze.

I hereby certify that the above described corner was properly established by me on August 23, 1983, and witnessed by Jim DeMastus and Tom Fisk.

REGISTERED PROFESSIONAL LAND SURVEYOR

William L. Hanley

OREGON
JULY 14, 1978
WILLIAM L. HANLEY
1639

Office of.....County Surveyor..... County of..... Union.....

State of.....Oregon....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

UNION COUNTY SURVEYOR

Date Received 9-6-83
* GPO - 776-276

Date Filed 9-12-83

By G. LANGUTZ, DEPUTY

File No. 339-83 R

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200148

QUARTER COMMON TO: 6 & 7

TWP. 2 S. RGE. 38 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: JUNE 2001

LAT: 45 ° 24 ' 45.81063 " N

SURVEYOR: RICK G. ROBINSON
OPLS 2219

LONG: 118 ° 6 ' 25.65473 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 645665.590 INT FT.

E: 8816488.388 INT FT.

TYPE: GPS

THETA: 1 ° 41 ' 49.1732096 "


ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9999036323

ELEV: 5243.93 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

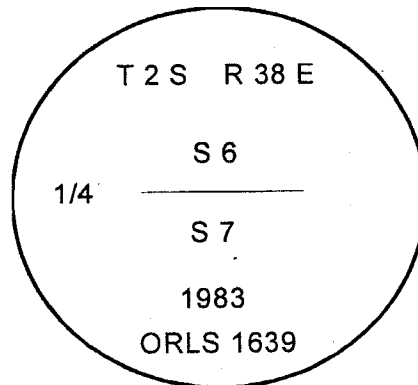

REGISTERED PROFESSIONAL LAND SURVEYOR
OREGON JULY 17, 1988 RICK G. ROBINSON 2219

Renewal Date December 31, 2002

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)