


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by D.P. Thompson under GLO contract number 103, dated Sept. 3, 1863. Surveyor General record states:

Set Post for 1/4 corner to sec 9 and 10 from which;

- A pine, 24 in. diam. bears N5°E, 44 lks.
- A pine, 20 in. diam. bears N6°W, 423 lks.



DIAGRAM

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE.

The area has been disturbed, no evidence of the original trees remains.

See Map of Survey No. 017-1993.


DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position, determined by survey, I set a 2-1/2' X 30" aluminum pipe with cap marked as shown 30" in the ground from which;

- A 33" Ponderosa pine bears N65°E, 36.00 ft. mk'd with a 60d spike in root crown, rt. side.
- A 5/8"x30" rebar with aluminum cap, bears S40°E, 4.12 ft. mk'd "UNION COUNTY SURVEYOR SE RP"
- A 25" Ponderosa pine bears S39°W, 29.27 ft. mk'd with a 60d spike in root crown, rt. side.
- A 44" Ponderosa pine bears N54°W, 27.50 ft. mk'd with a 60d spike in root crown, rt. side.

Set steel fence post 2 ft. east in a N-S fence line.

I hereby certify that the above corner point was perpetuated as hereon described on April 19, 1993.
Witnesses: Jeff Petersen

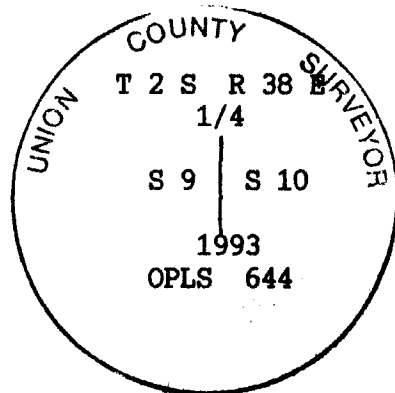

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to the point as noted.

UNION COUNTY SURVEYOR

Date Received 4/26/93

Date Filed 5/6/93

By *Gregory T. Blaker*

File No. 007-1993R

G-13 (5713)

GEODETIC CONTROL DATA

OREGON STATE PLANE, NORTH ZONE (3601)
UNION COUNTY, OREGON

STA. NAME: 9909

QUARTER CORNER:

SEC 9 | 10

TWP.2 S. RGE.38 E

UNION COUNTY, OREGON

DATE TIED: JULY, 1999

SURVEYOR: WALTER L. CASWELL
PLS 737

FIRM: EAGLE GPS SURVEY CORP
6110 SW LOMBARD AVE.
BEAVERTON, OR. 97008-4736
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 1

GEODETIC COOR: NAD 83(91)

LAT: 45°24'20.99019" N

LONG: 118°03'20.58200" W

SP. COOR: NAD 83(91)

N: 643548.153 INT.FT

E: 8829760.121 INT.FT.

THETA: 1°44'00.424"

SCALE FACTOR: 0.999903128

ELEV: 2647.36 U.S.FT.

ELEV. DATUM: NGVD 1929(1947)

DIRECTIONS "TO REACH":

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Albert Hertel 10-14-99

OREGON
JULY 18, 1980
ALBERT HERTEL
1896

EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005
SHEET 30 OF 63